


VINGTOR STENTOFON

VSS-V2 Sound Reception System
Assembly manual for replacement of microphones
For Microphone unit version from rev. 2.07

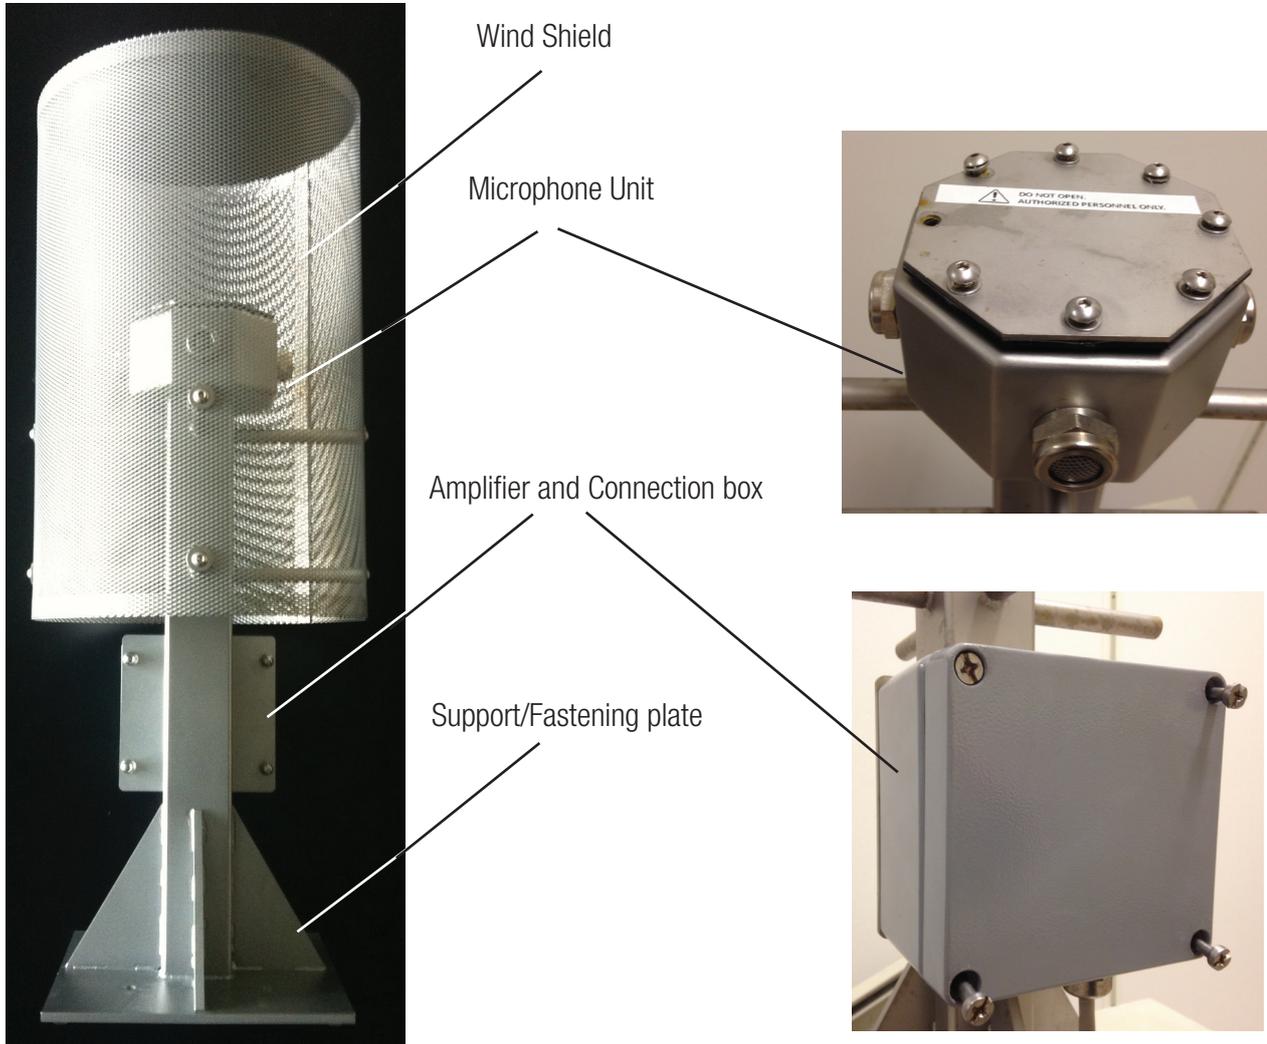

Complete Microphone Unit VSS-MU v2.08

Item.no.1021002100

Microphone Sparepart kit Item.no. 1021002002 consist of:

Item name	Qty	Item Description
VSS Mic	4	Microphone set with cable, mic. mesh and epoxy
VSS Mic PCB	1	Microphone PCB
Sealing	1	Top lid sealing gasket
Manual	1	Assembly guide for replacement of microphones

Tool requirements




2x Wrench with 24.mm opening



Screwdriver, star for M6x30



Unbraco 3 and 4 mm

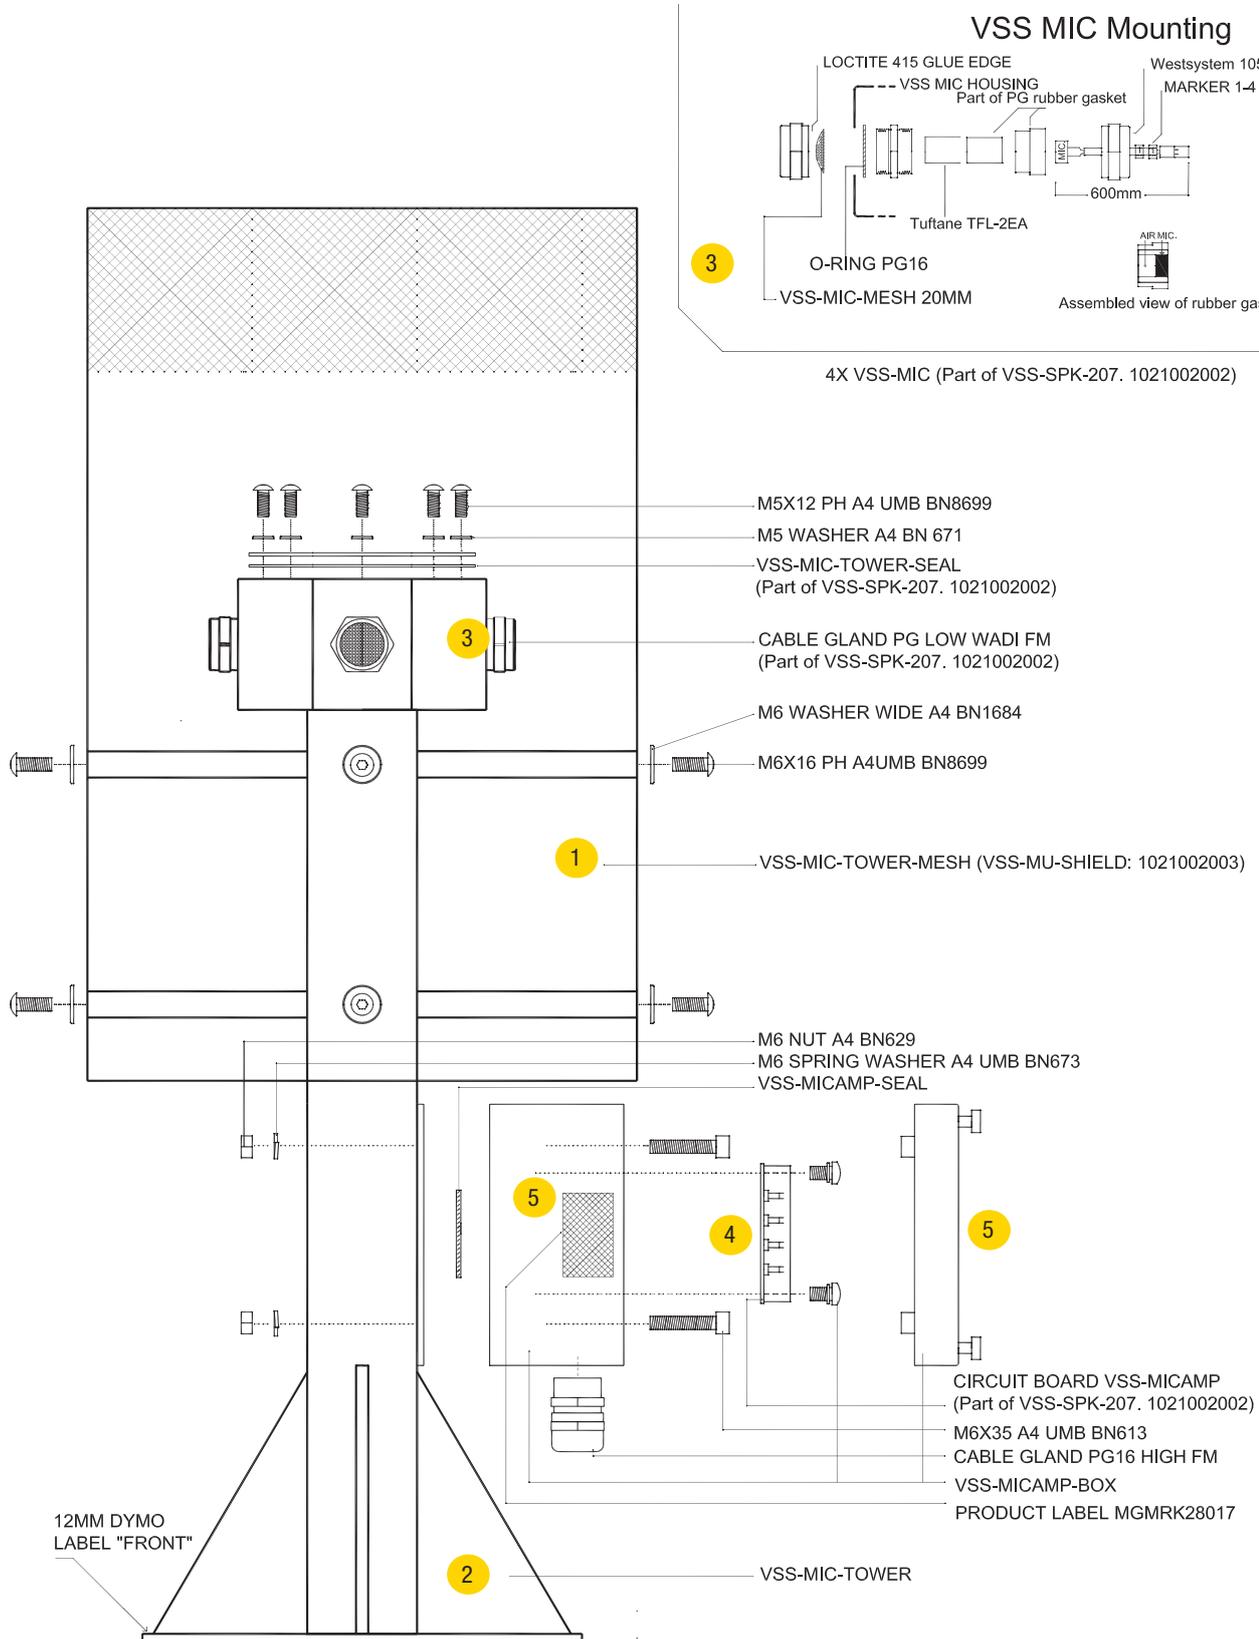


IMPORTANT NOTE!

Microphone change as described herein shall only be performed in dry weather conditions or indoors.

Item	Component	Ref.	Qty	Item Description	Comments
1	VSS-MIC-TOWER MESH	1	1	Remove 8 screws and washers around the circumference and lift the Mic tower mesh gently up and off the Microphone unit	
2	VSS-MICAMP-BOX	5	1	Unscrew 4 bolts in front of Mic amp box and remove the lid.	
3	VSS-MICAMP	4	4	Remove 4 copper screws holding PCB	
4	VSS-MICAMP	4	1	Unplug and remove mic amp PCB from the box	
5	VSS-MIC-TOWER	2	8	Remove the 8 screws on the top of the microphone unit.	
6	VSS-MIC-TOWER	2	8	Remove washers	
7	VSS-MIC-TOWER	2	1	Take off the top lid from the microphone unit.	
8	VSS-MIC-TOWER	2	1	Remove sealing (gasket)	
9	VSS-MIC	3	4	Dismount all four microphones and wires from unit by holding the microphone in place with a wrench inside the microphone unit and unscrewing the nut in the front of the microphone with another wrench. Pull the microphone cables gently out from the microphone unit column.	
10	VSS-MIC	3	4	Mount new microphone spare parts in housing. Start with microphone 1 in front direction (left in assembly drawing) Mount microphone 2-4 clockwise hereafter. Thread the O-ring over the front part of the microphone and insert it from inside the microphone unit and attach and fasten the nut from outside the microphone unit. Fasten using two wrenches.	O-RING (301-920) shall be placed inside the housing
11	VSS-MIC	3	4	Insert microphone wires into tower column and enter the end through the opening in the Mic amp box.	Make sure to put back excess wires into tower and push them downwards to make a loop located lower than hole to mic amp.
12	VSS-MICAMP	4	1	Place mic amp PCB back in the box, insert and fasten 4 screws and connect microphone wires.	
13	VSS-MICAMP	4	4	Mount PCB and connect master panel.	
14	VSS-MICAMP-BOX	5	1	Place lid to mic amp box and fasten the 4 screws	
15	VSS-MIC-TOWER	2	1	Place mictower seal on top of mic. unit	
16	VSS-MIC-TOWER	2	1	Place top lid onto mictower sealing and make sure that they are aligned.	
17	VSS-MIC-TOWER	2	8	Place washers onto top lid	
18	VSS-MIC-TOWER	2	8	Mount and fasten top lid	Fasten bolts with a torque force of 3Nm.
19	VSS-MIC-TOWER- MESH	1	1	Replace the Mic tower mesh and attach and fasten 8 screws and washers.	

Photos

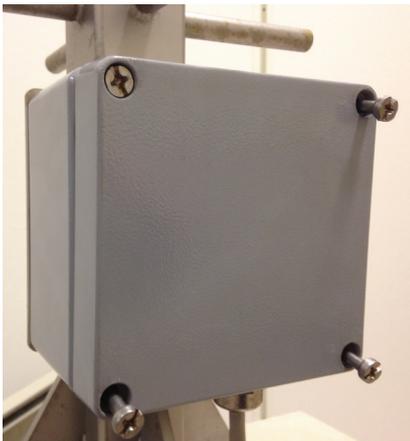

DOC NO

A100K11577 v.2

DATE

06.09.2016

customer.service@zenitel.com



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. STENTOFON and VINGTOR products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice. ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend. Zenitel – All rights reserved.