




TMIV-1+ Turbine Mini Video Intercom

Mounting Guide


1 Turbine Mini Video Intercom

This document describes the dimensions, mounting procedure, and camera Field of View of the TMIV-1+ Turbine Mini Video Intercom. **Zenitel takes no responsibility for damages caused by improper or inadequate mounting.**


Item Number	Type	Item Name
1008117010	TMIV-1+	Turbine Mini Video Intercom
1008140020	TA-2	Flush Mount 2-Gang Double-Depth Back Box
1008140030	TA-3	Flush Mount 2-Gang Back Box
1008140320	TA-32	On-Wall Back Box

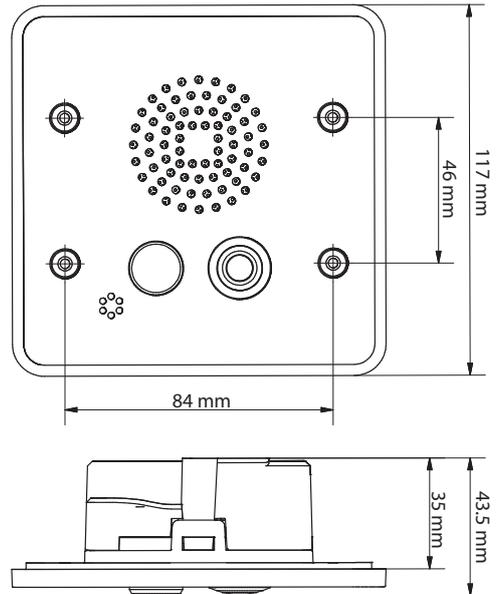

2 Flush Mount 2-Gang Back Boxes - TA-2 & TA-3

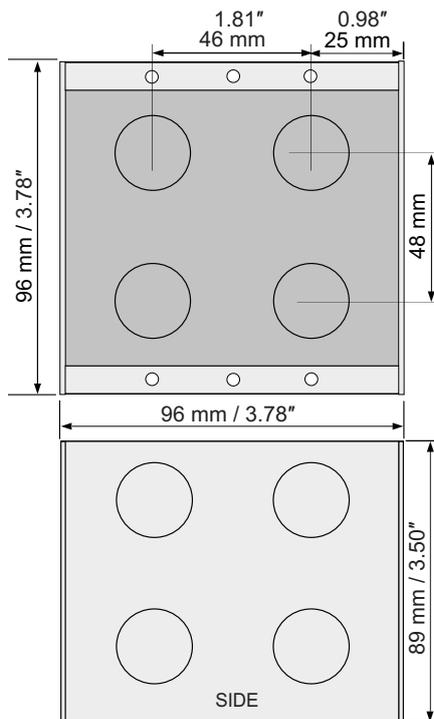


TA-2

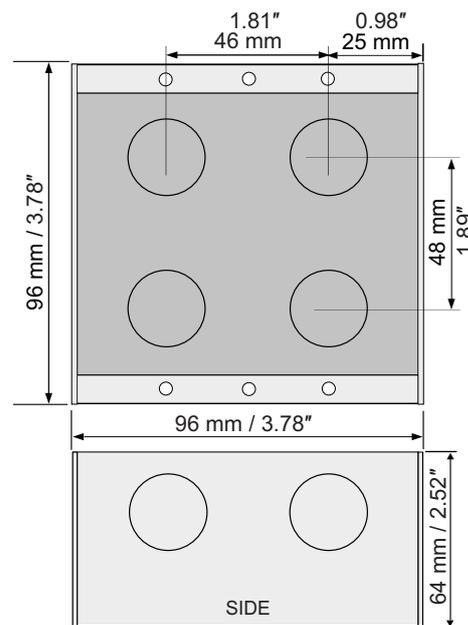

TA-3

① It is recommended to utilize back boxes with weep holes at the bottom.


3 Flush Mounting Procedure

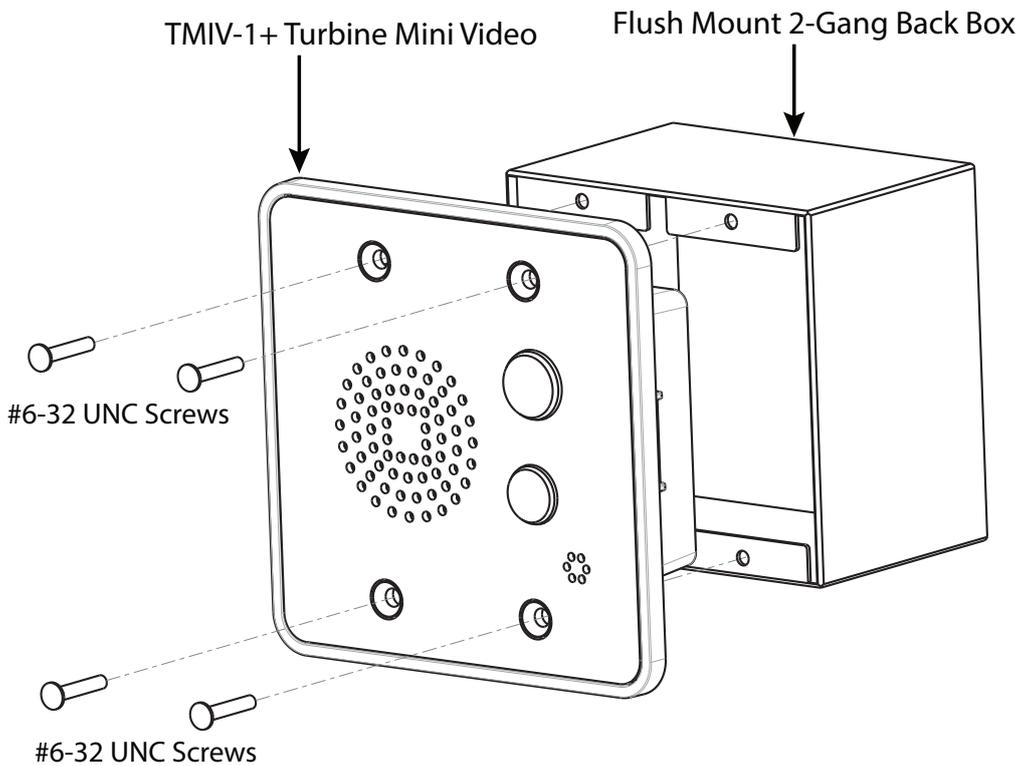


To attain the rated ingress protection of IP44, flush mounting of TMIV-1+ must only be done on a surface that is completely planar, smooth, and clean. Any surface irregularities must not exceed 0.5 mm. If this is not achievable in a reliable manner, appropriate sealant or filler should be applied to seal the gap between the station and the wall. Optionally, the on-wall back box TA-32 could be used.

1. Mount the 2-gang back box into the wall
2. Fasten the TMIV-1+ intercom to the back box with four #6-32 UNC countersunk-head screws

4 Camera Field of View

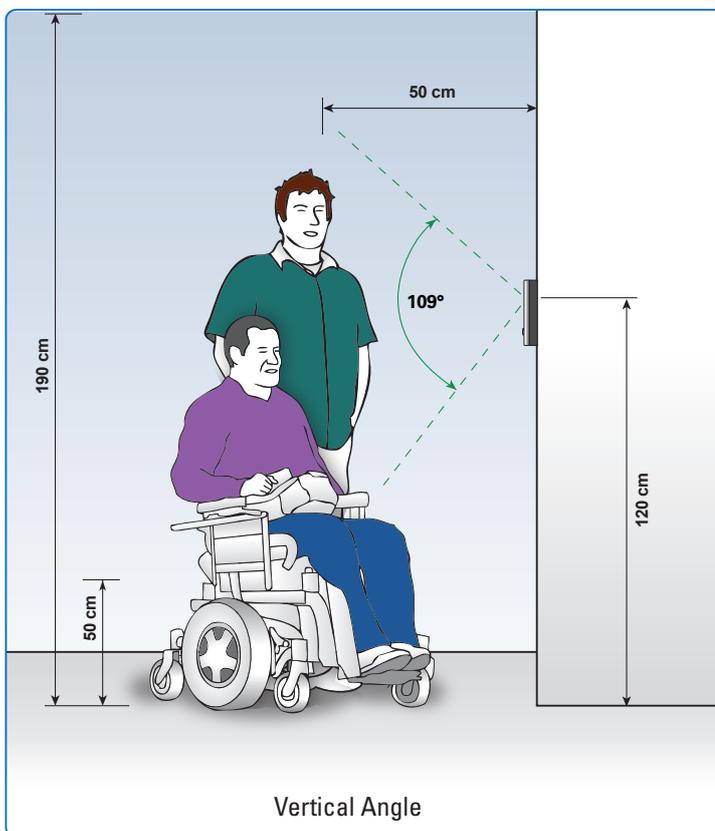

Vertical Angle

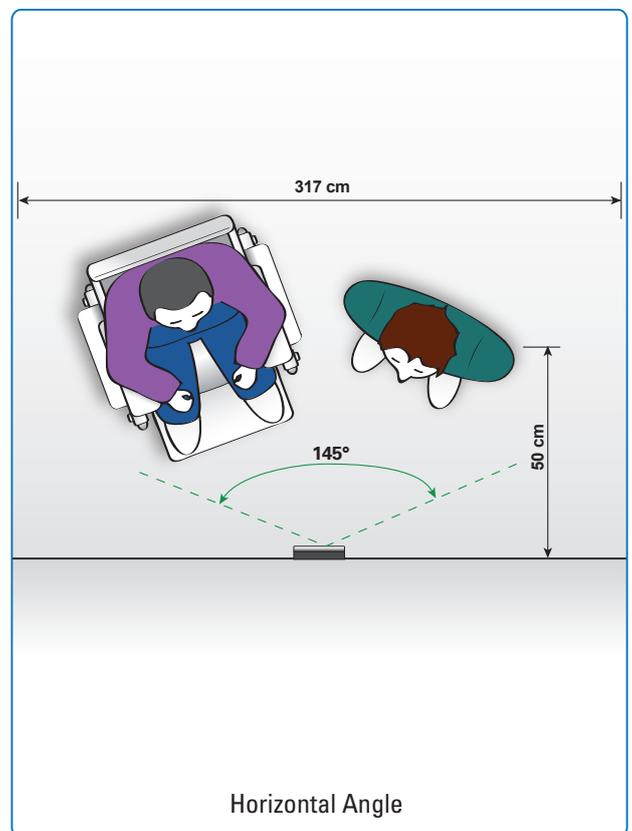

Horizontal Angle