

1007086000

Industrial Master Station

Heavy Duty



Industrial Intercom

Description

- ✓ Master station with free access to all extensions and features
- ✓ Rugged waterproof and dustproof casing in orange aluminium alloy
- ✓ Microphone along with red microphone live lamp
- ✓ External loudspeaker. Sound level adjustable with a potentiometer inside the station
- ✓ Built-in 10 W (8 ohm) VOX operated power amplifier or external loudspeaker
- ✓ Screw terminals for easy connection of installation cables
- ✓ Equipped with 4 direct access keys

This Industrial Master station is a waterproof model designed for humid, dirty and outdoor conditions. The station


consists of a rugged waterproof and dustproof casing (IP -65) of orange silumin. The front panel is hinged to the back casing to allow easy access during installation and service. The station has screw terminals with labels and the 4 glands allow waterproof and dustproof connection of installation cable and loudspeaker wires.

The station is equipped with an internal electret microphone. The volume is adjustable with a potentiometer located inside the casing. An external 20-70 ohm speaker can be connected or, alternatively, connect an 8-20 ohm speaker for use with the built-in 10 W (8 ohm) VO X operated power amplifier. The power amplifier requires a separate 12 V AC/2 A power supply. The external speaker must be placed at least one meter away from the station.

The station is programmable for permanent private mode and is also prepared for connection of an external handset unit.

See also: [additional documentation on wiki.zenitel.com](https://wiki.zenitel.com)

Technical Dimensions

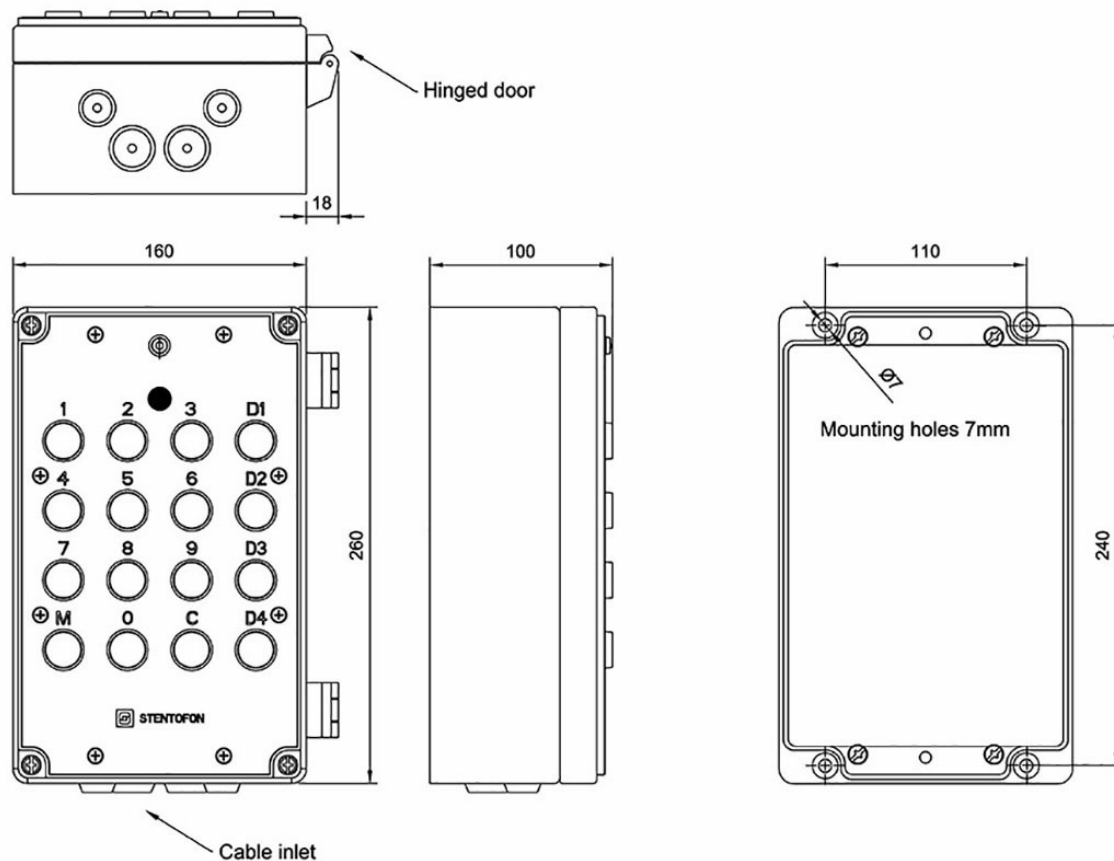

Specifications

MECHANICAL

| | |
|--|--|
| Ordering Number: | 1007086000 |
| Operating voltage | From exchange without power amp. 12 VAC/2 A with power amp. |
| Cable requirements | 2 pair 0.5 mm \varnothing /24 AWG twisted telephone cable. + 1 pair 0.8mm \varnothing /20 AWG (to transf. if power amp. is used) |
| Temperature | -50oC to +55oC |
| Relative humidity | 0% - 95% |
| Dimensions (W X H X D) | 160 x 260 x 100 mm, 6.24" x 14.04" x 4.29" |
| Classification | IP-65 |
| Finish | Silumin (aluminium alloy), Orange RAL 2004 paint |
| Max. loudspeaker output, external speaker: | 1.5 W (20 ohm), 10 W (8 ohm) w/power amplifier |

| ORDER NUMBER | DESCRIPTION | SHIP WEIGHT |
|--------------|---|-------------------|
| 1007086000 | Industrial Master Station, heavy duty (IP-65, external speaker is required) | 1.1 kg/2 lb. 7 oz |
| Accessories: | | |
| VML-1520 | Horn Loudspeaker, 15W/20 Ohm, IP-66 | 1.4 kg/3 lb |
| VMP-211 | Wall Mount Handset Unit (with PTT key), IP-44 | 0.9 kg/2 lb |
| VMP-250 | Wall Mount Handset Unit (with PTT key), IP-65 | 0.9 kg/2 lb |

AUDIO

| | |
|-------------------------------------|---|
| Loudspeaker impedance | 20-70 ohm external (without pow.amp.), 8-20 ohm external. (with power amp.) |
| Frequency range | 500-5000 Hz (+/- 8 dB) |
| Mic. impedance for external handset | 200 - 600 ohm |
| Gland diameter | 2 x PG7 + 2 x Pg9 |
| Connector type | Screw terminals |
| Indicator | LED (red) |

Accessories



VMP-36-PEL-A

Headset with boom mic, headband, and 10m cable for VMP Station



VMP-36-PELP-A

Headset with boom mic, headband, and 10m cable



VMP-36-PEL-A/15

Headset with boom mic, headband, and 15m cable for VMP Station



VMP-36-PEL-A/20

Headset with boom mic, headband, and 20m cable for VMP Station



CD-7-VMP

Plugbox Waterproof for VMP-36-PELP



VMP-211

Wall Mounted Handset



VMP-250

Wall Mounted Handset Waterproof



VML-1520

Horn Loudspeaker 15W, 20 OHM Waterproof



EHS-24O

Rotary Light 24V DC, Orange



EHS-2200

Rotary Light 220VAC



Model-A

Telephone Booth



IRR-3

Relay Box