

23402200xx - L-101-xx Y Xenon Strobe, IP-66 Yellow

2340220009

L-101-115Y

Xenon Strobes 115VAC, IP66, Yellow

Also available in other colors:

- 2340220007 : L-101-115R Xenon Strobe, 115V AC, IP-66 Red
- 2340220008 : L-101-115A Xenon Strobe, 115V AC, IP-66 Amber
- 2340220009 : L-101-115Y Xenon Strobe, 115V AC, IP-66
- 2340220010 : L-101-115G Xenon Strobe, 115V AC, IP-66 Green
- 2340220011 : L-101-115B Xenon Strobe, 115V AC, IP-66 Blue
- 2340220012 : L-101-115C Xenon Strobe, 115V AC, IP -66 Clear



IP66

Description


- Pluggable terminals.
- In and out terminals.
- Multiple, user selectable flash rates.
- User replaceable Xenon tube lamp.
- Can be stacked to create multi-signal units.

The L-101-115Y is a compact, robust 5 Joule Xenon strobe beacon ideal for all general signalling applications including fire, security and process control. Features an automatically synchronised flash rate of 1Hz (60 flashes per minute).

Technical Dimensions

page 1/3

certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

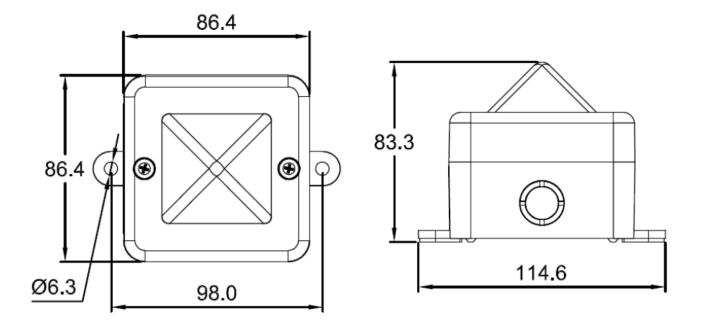

Specifications

GENERAL

Dimension (HxWxD) (mm)	86 x 86 x 83
Weight	0.20 kg
Energy	5 Joules (5Ws)
Flash rate	1Hz
Terminals	0.5 to 4 mm2 cables
Lens Colours	Red, Amber, Yellow, Green, Blue, Clear
Tube life	70% after 8000000 flashes
IP	IP-66
Operative temperature	-25 ℃ to +55 ℃
Relative humidity	90% at 20 ℃

VERSION:	VOLTAGE RANGE:	CURRENT MA:
115 VAC 50/60 Hz	+/-10%	70 mA

ITEM NUMBER	DESCRIPTION	
2340220007	L-101-115R Xenon Strobe, 115V AC, IP-66 Red	
2340220008	L-101-115A Xenon Strobe, 115V AC, IP-66 Amber	
2340220009	L-101-115Y Xenon Strobe, 115V AC, IP-66 Yellow	
2340220010	L-101-115G Xenon Strobe, 115V AC, IP-66 Green	
2340220011	L-101-115B Xenon Strobe, 115V AC, IP-66 Blue	
2340220012	L-101-115C Xenon Strobe, 115V AC, IP -66 Clear	

ACCESSORIES

9021903001	Spare Lens for Beacon L101, Green	
------------	--------------------------------------	--

page 3/3