



4000016817

P-1603 PAGA Alarm Control Panel


Note: This product is only available as spare part.


Description

- RS485 data communication with MPA 1600 Operation Unit
- 4 alarm keys marked with the text "ALARM" and red color
- Cancel key
- Protection against unauthorized use by means of time-trap functionality (the alarm keys and the cancel keys must be held for 1 sec. before activation)
- 6 LEDs indicating alarm status in each zone
- LED indicators for all keys
- Dimmable backlight and LEDs, remotely controlled from the adjacent MPA P-1601 Control Unit
- Complies with IEC 60945 Standard for Marine Equipment
- DNV-GL/ABS/RMRS/CCS/RINA type approval

page 1/3

Technical Dimensions

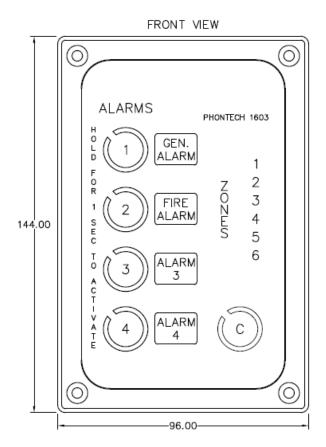



Specifications

MECHANICAL

Dimensions (WxHxD)	96x144x24 mm
Weight	0.5 kg
Color	RAL 9005 / Natural
Material	Aluminium / Steel
Mounting	Console
Fixing	4 x M4 bolts
Access	Front
Cable Entry	Rear
Cable Type	2-pair cable, twisted pairs, min 2x2x0.5 mm2

ELECTRICAL

Power Supply	24VDC from Control Rack (+/- floating)
Power Consumption	2.4 W
Termination	Termination Block
Compass Safe Distance	50 cm

ENVIRONMENTAL

Temperature	-15°C to +55°C	
Humidity	20% to 80% non- condensing	
Ingress Protection Rating	IP-44	

SPARE PART

Main Board	PN 4000085154 - BRD
IVIAIII DOAIU	03118-009

page 3/3