

ITCS-S

Signaling Unit



Description


- Old is indicated by buzzer and red "ALARM" LE diode
- Both audio and visual alarm are present until call is accepted and completely reset
- Bulkhead mounting (flush on request)


Signaling unit for indication of call used in ITCS-A calling system.

Technical Dimensions


certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is



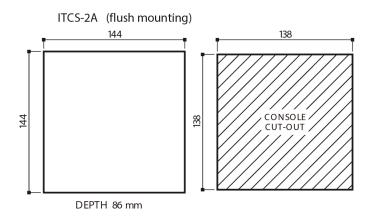

ITCS-R1, ITCS-S, ITCS-RS ITCS-C1, ITCS-C2, ITCS-C3, ITCS-C4



All dimensions in mm

Specifications

MECHANICAL

Dimensions (WxHxD)	80x125x58 mm
Weight	0.24 kg

Used With



ITCS-1A-24VDC

Single Call Control Unit, 24 VDC



ITCS-2A-24VDC

Double Call Control Unit, 24 VDC



ITCS-1A-230VAC

Single Call Control Unit, 230 VAC



ITCS-2A-230VAC

Double Call Control Unit, 230 VAC