

4000017151

**P-5113**

Telephone with Relay



---


## Description


This item has been replaced by item number 2213000300

- ✓ DTMF analog telephone
- ✓ Loudspeaking / handset operation
- ✓ Memory buttons
- ✓ Built-in relay, max 5A
- ✓ External loudspeaker connection
- ✓ Complies with IEC 60945 Standard for Marine Equipment
- ✓ DNV GL type approval and compatible with NORSOK

The P-5113 is an analog flush-mounted console telephone with speakerphone functionality.

# Technical Dimensions

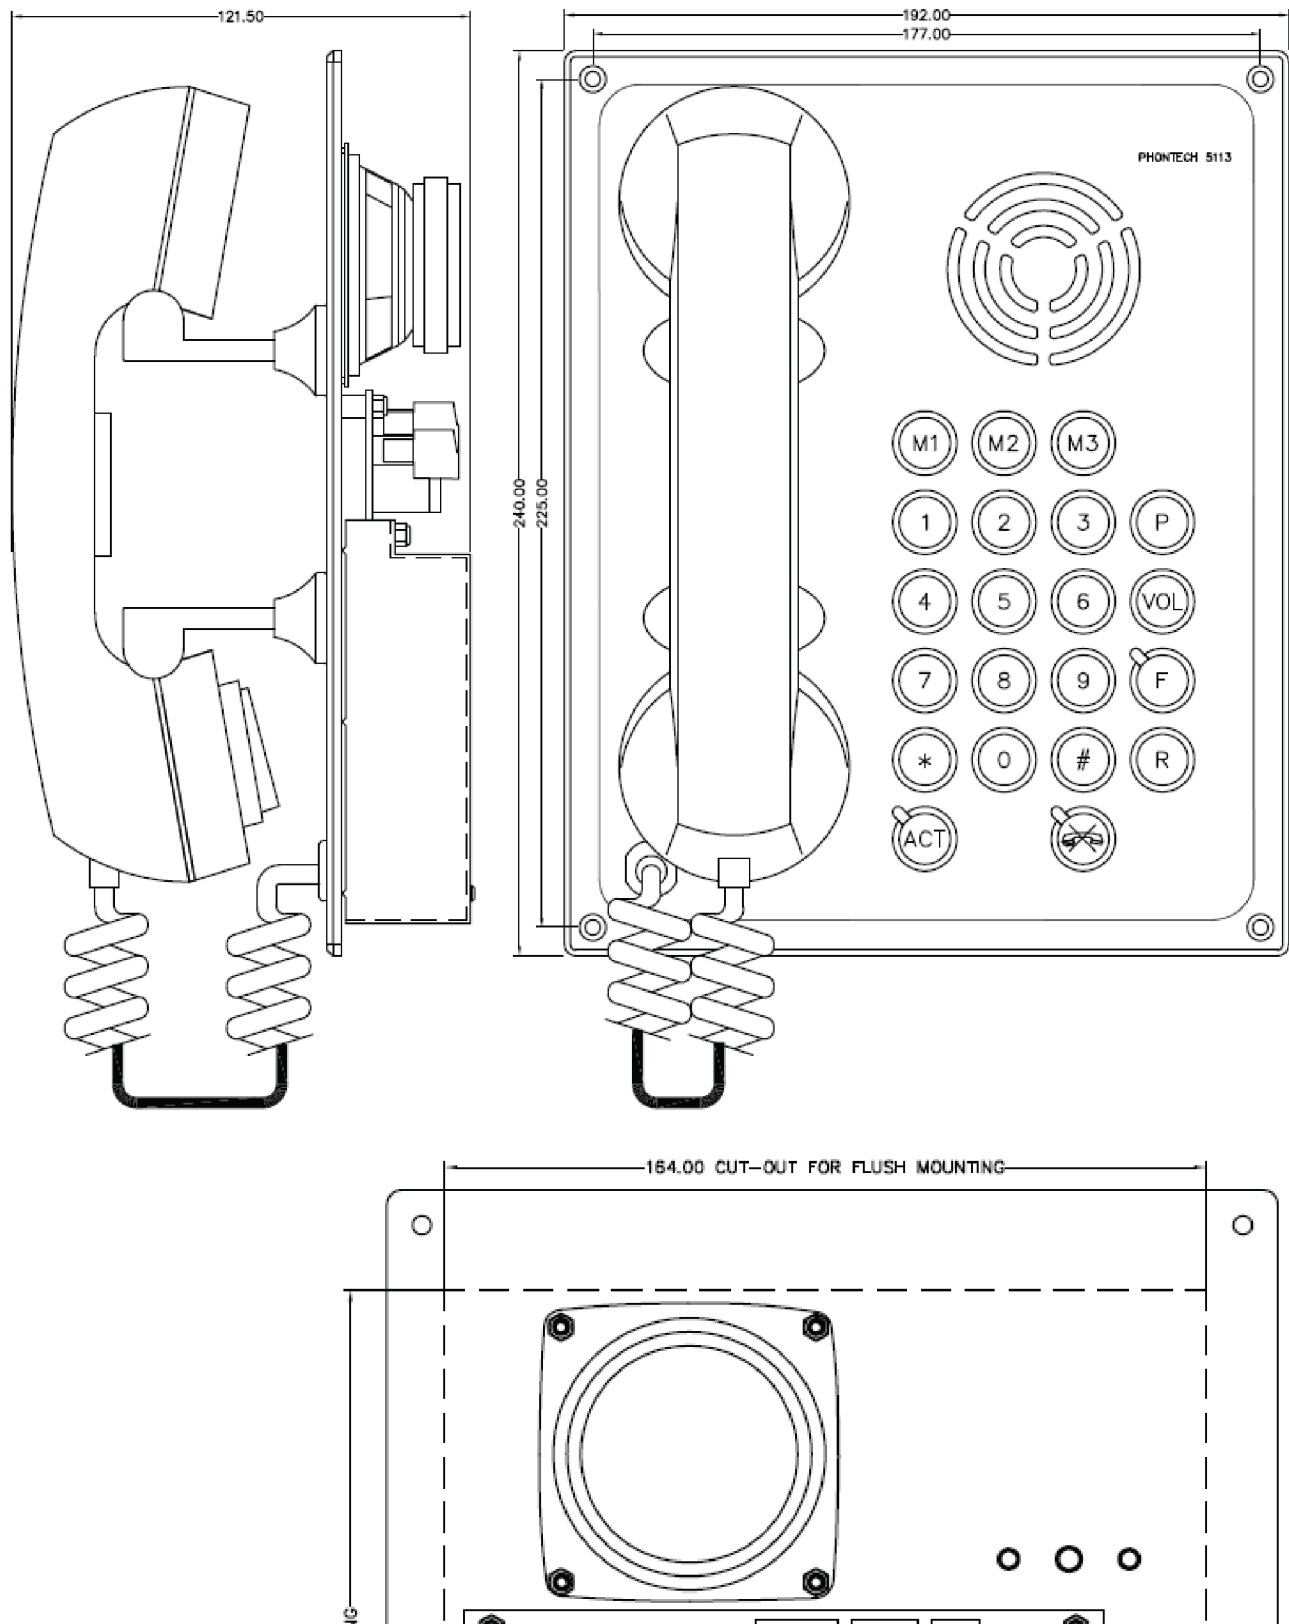

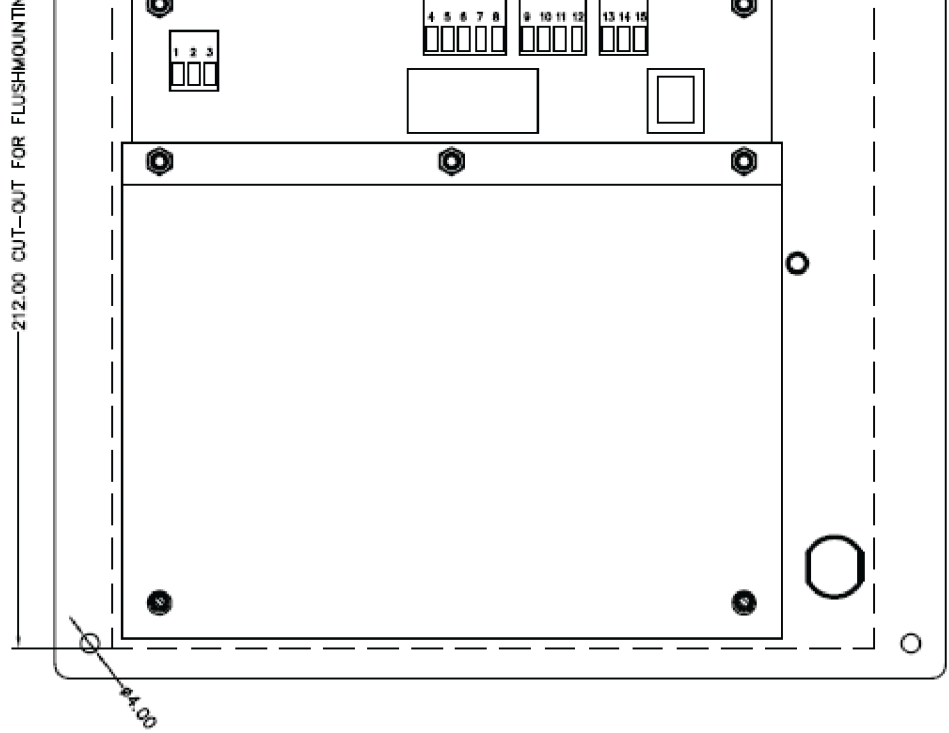

# Specifications

## MECHANICAL

Dimensions (WxHxD)	192x240x121.5 mm
Weight	1.2 kg
Material	Aluminium / PC
Color	RAL 9005
Mounting	Flush / Console
Fixing	4 x M4 bolts
Access	Front
Cable Entry	Rear

## ELECTRICAL

Power Supply	22-32 VDC / 10 W (max when external loudspeaker is connected)
Telephone line feed voltage	24-64 VDC
24-64 VDC Ring Voltage / Frequency	$45 < R < 110V$ / $18 < F < 25$ Hz
Termination	Screw terminals $\leq 1.5$ mm <sup>2</sup>
Compass Safe Distance	$> 1.9$ m
Dial Method	DTMF (ITU-T Q23)
Ringing Volume	$\geq 75$ dB(A) at 1 m distance

## ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-22