

3006100032

CW-4T

Wall Loudspeaker 6W



Description


- ✓ Wall loudspeaker w/ transformer for accommodation area
- ✓ Excellent for P.A. intercom and background music
- ✓ With 100V line transformer

Screw the bracket on the wall, and fasten the cabinet to the bracket with one screw.


For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.

Technical Dimensions


REAR VIEW

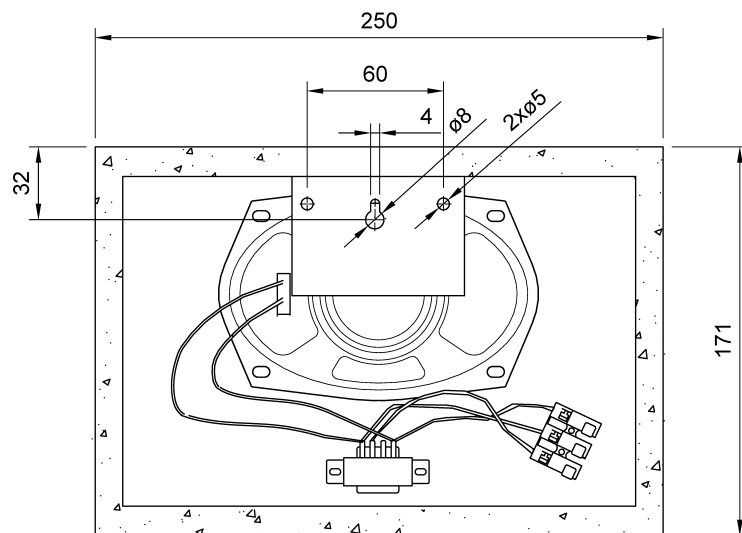

RIGHT VIEW

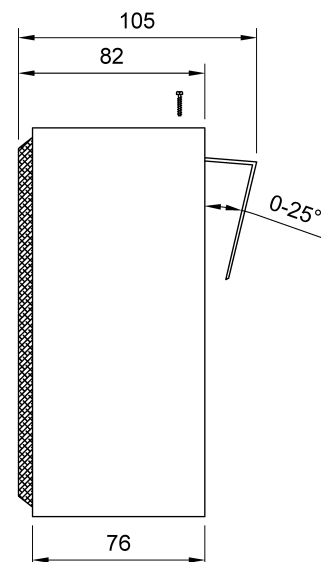

CIRCUIT DIAGRAM

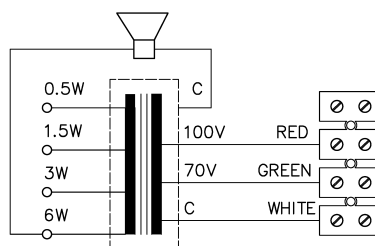

Secondary nominal tapings

C: 6	6,0W
C: 3	3,0W
C: 1,5	1,5W
C: 0,5	0,5W

Specifications

GENERAL

Dimensions (mm)	250W x 170H x 88D
Weight	1.2 kg
Mounting	Screws, keyhole
Material/ Color	Particle board / White or walnut
Temperature range	Max. / min. amb. temp 90°C / -40°C
Max. / min. ambient temperature	90°C / -40°C
Connections	Spring clamp
Rated / max. power	6W / 8 W
SPL 1W/1m	90dB
SPL rated power	97dB
Effective freq. range	140 - 20000Hz
Dispersion	(-6dB)1kHz / 4kHz 140° / 80°
Environmental Condition	Protected