

4000015280-HP-6CTF-Image

4000016482

HP-6C

Horn Loudspeaker 6W



Onboard communication




IP67


Description

- ✓ General purpose 6W horn loudspeaker available in both low ohmic and 100V versions
- ✓ Especially suitable for use in industrial sites or tough environments


Technical Dimensions

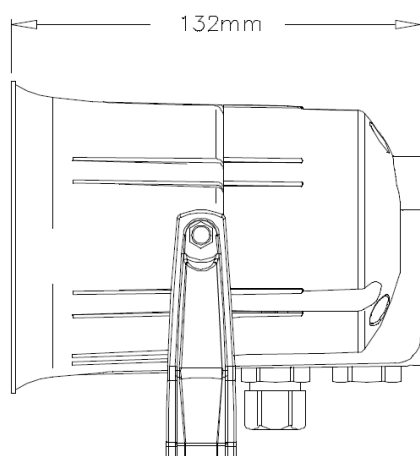

1xM20 cable gland
1xM20 blanking plug
cable diameter
6 – 12mm

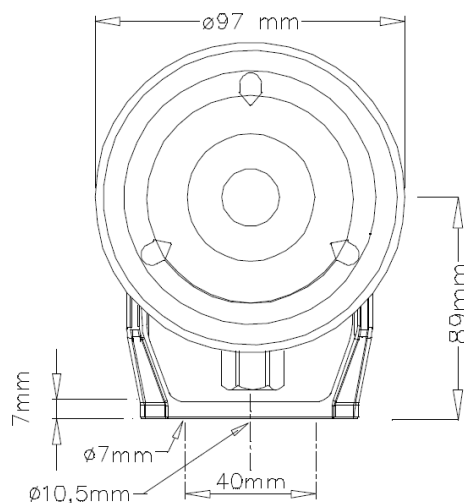

All outside nuts and
screws in stainless steel



| 100V transformer Secondary nominal tapings | |
|--|-------|
| C : 6W | 6,0 W |
| C : 3W | 3,0 W |
| C : 1,5W | 1,5 W |
| C : 0,5W | 0,5 W |

Specifications

GENERAL

| | |
|---------------------------------|--------------------------|
| Material / Color | Polyamide / RAL 7035 |
| Dimensions | Ø97 x 132D mm |
| Mounting | Bracket |
| Termination | Internal screw terminals |
| Weight | 0.7 kg |
| Rated / Max power | 6 W / 10 W |
| SPL 1W / 1 m | 100 dB |
| SPL rated power | 107 dB |
| Effective frequency range | 300 - 20000 Hz |
| Dispersion (-6dB) 1kHz / 4kHz | 178° / 62° |
| IP-rating | 67 |
| Max. / min. ambient temperature | 110°C / -40°C |
| Environmental Condition | Exposed |

PRODUCT VARIANTS

| | |
|------------|---|
| 4000015280 | HP-6CTF Mini Horn Loudspeaker, 6W, 100V, IP67 with fuse |
| 4000016482 | HP-6C/20 Mini Horn Loudspeaker, 6W, 20 Ohm, IP67 |
| | |
| | |