

WM15-RD Front

3005010211


VM15-RD

Dual Volume Control 4 Wire Override 2x15W

Description

- Dual volume control, 4 wire override 2x 15W
- For use in Public address and general alarm system
- For flush mounting
- Optional, wall mounting by using back box

Technical Dimensions

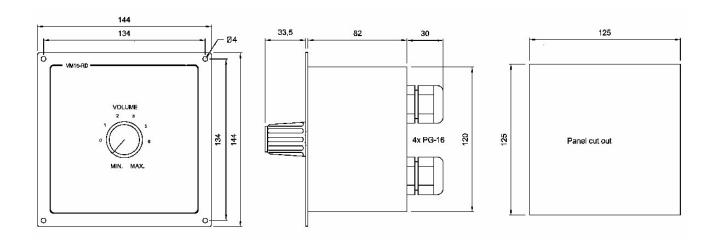

certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is

Specifications

GENERAL

Material / Colour	Black anodized aluminium
Dimension (mm)	144W x 144H x 82D
Mounting	Flush with 4x4 mm screws
Cable gland	4 x PG-16
Input	From 100V amplifier
Output	100V
Output power	2 x 15 W
Override power supply	24V DC / 20mA
Termination	Plugable screw terminals for max 2.5mm2 cable
Weight	0.7 kg
Operating temperature	-15°C to +55°C
Environmental Condition	Protected

Accessories



SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

page 2/2