

3006102041

EHS-240

Rotary Light 24V DC, Orange





Description

- ✓ Used in noisy areas to indicate a call
- ✓ Equipped with 1m Cable
- ✓ 24 VDC

Rotating beacon in painted mild steel housing, for less aggressive environments. Enduring with low noise friction-gear.

Technical Dimensions

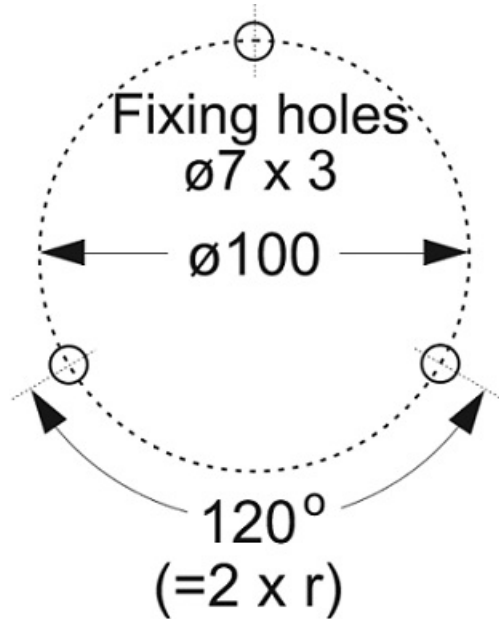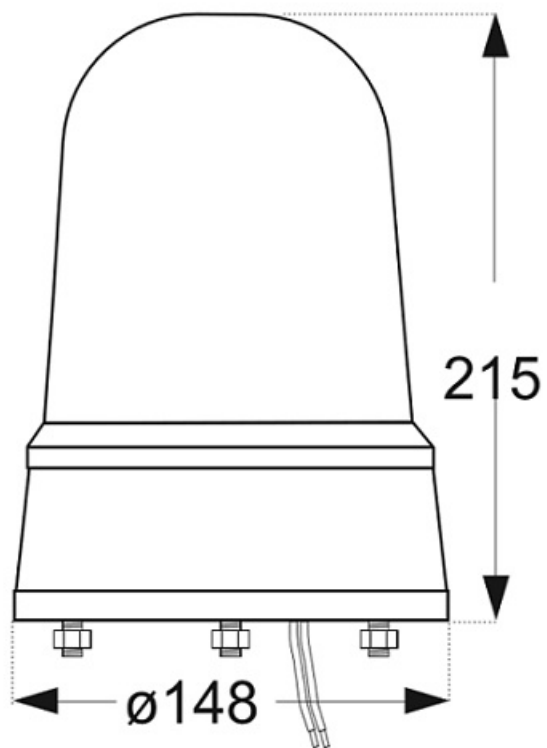

Specifications

GENERAL

| | |
|-------------------------|----------------------------------------|
| Operating voltage | 24V DC +-10% |
| Lamp source | 70 W halogen (H1) |
| Rated current | 3A |
| Flash frequency | 180 r.p.m. |
| Operating temp | -10°C to +50°C |
| Material | Housing : Painted mild st. / Lens : PC |
| Housing Colour | Grey |
| Duty cycle | 100% |
| Connection | 1mtr. cable |
| IP-class | IP-54 |
| Dimensions (mm) | 148Ø x 215H |
| Weight | 1.1 kg |
| Environmental Condition | Protected |

| ORDER NUMBER | DESCRIPTION |
|--------------|-------------|
|--------------|-------------|

| | |
|------------|--------------------------------------|
| 3006102038 | EHS-24B Rotary Light 24VDC Blue |
| 3006102039 | EHS-24G Rotary Light 24VDC Green |
| 3006102040 | EHS-24K Rotary Light 24VDC Clear |
| 3006102041 | EHS-24R Rotary Light 24VDC Orange |
| 3006102042 | EHS-24R Rotary Light 24VDC Red |

ACCESSORIES

| | |
|------------|-------------------------------|
| 3006102051 | Spare Lens for EHS, Blue |
| 3006102052 | Spare Lens for EHS, Orange |
| 3006102053 | Spare Lens for EHS, Green |
| 3006204181 | Spare Lens for EHS, Clear |
| 3006102082 | Spare Lens for EHS, Red |