

2310111116

HT ZB2X SeaHawk Zoom Bullet

SeaHawk Zoom Bullet (20x Zoom), IP Camera



- ✓ PoE - Power over Ethernet
- ✓ Stream compression H265/H264
- ✓ Motion Detection
- ✓ No sharp edges
- ✓ Designed to meet IEC60945
- ✓ IP66/IP67
- ✓ Mounting Options: Ceiling/Wall
- ✓ Day/night mode
- ✓ Infrared LEDs 10 pcs
- ✓ 20x Zoom

ONVIF ONVIF Conformant



Onboard communication



IP66



IP67



H.264

Description


The new HATTELAND® SeaHawk range of network enabled Security & Surveillance Cameras suitable for Security applications (person / area) and Industrial applications (process monitoring).

HATTELAND® SeaHawk Zoom Bullet IP Camera is the perfect IP camera solution with full HD resolution at 30fps. The camera housing is constructed in sturdy POM material. 20x Zoom, PoE - Power over Ethernet, Stream compression H265/H264, Motion Detection, No sharp edges.

Available models:

- ✓ HT ZB2X AA-X1 SeaHawk ZoomBullet 20x POM Black RAL TBD

Technical Dimensions

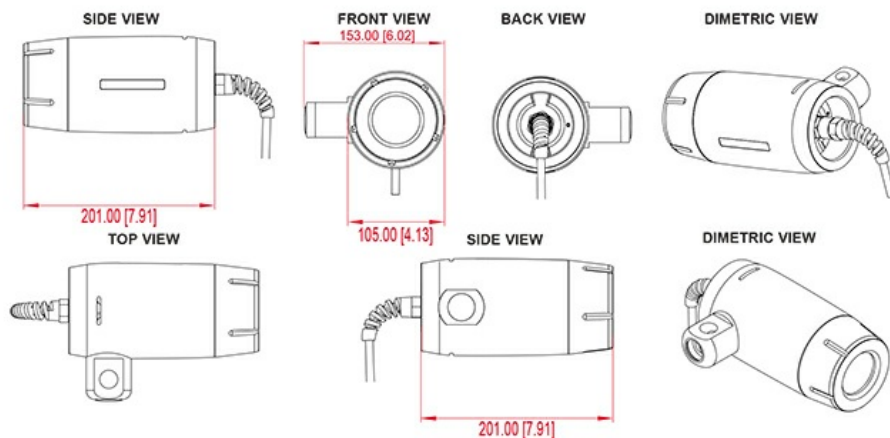


With HT MB11-AA Note: Variant of model illustration shown below

DIMETRIC VIEW
Ceiling mount




TOP VIEW
Ceiling mount




FRONT VIEW
Ceiling mount



SIDE VIEW
Ceiling mount




Max Pan and Tilt angles




DIMETRIC VIEW
Wall Mount




TOP VIEW
Wall Mount




BACK VIEW
Wall Mount



SIDE VIEW
Wall Mount



Max Pan and Tilt angles



Specifications

TECHNICAL SPECIFICATIONS:

Image Sensor	1/2.8" Progressive Scan CMOS
Lens Type	Auto DC Iris, Zoom, IR cut filter
Zoom	20 x (optical, motorized)
Focal Length	f=4.8mm ~ 57.6mm
Maximum Aperture Ratio	F2.2 (wide) ~ 2.3 (tele)
Angle of View	Wide: H: 64.2°, V: 37.5° // Tele: H: 5.9°, V: 3.3°
Electronic Shutter View	1 ~ 1/30 sec (B/W), 1/24 ~ 1/1000 sec (color)
Flip Mode	Horizontal, Vertical
Image Enhancement	AGC, AWB, AE, TDN, DSS, BLC, WDR

VIDEO SPECIFICATIONS:

Compression	H265 / H264 / MJPEG
Frame Rate	Max 30fps @ 1920 x 1080
Bitrate	Primary: 32Kbps ~ 16Mbps // Secondary: 32Kbps ~ 4Mbps
Resolutions	352 x 240 ~ 1920 x 1080
Streaming	Primary: H265 / H264 // Secondary: H265 / H264 / MJPEG
Burn-in OSD	Multi-lingual

NETWORK SPECIFICATIONS:

Interface	1 x Ethernet 10/100base-T (RJ-45)
Protocol	IPv4/v6, TCP, UDP, IGMP (MULTICAST), ICMP, DHCP, HTTP, HTTPS, RTP, RTPS, FTP, SNMP, UPnP, WS-Discovery, Zero-configuration, NTP, DDNS
Security	Password protection, IP address filtering, HTTPS encryption
API	ONVIF, PSIA, MPEG-TS

EVENT AND GENERAL SPECIFICATIONS:

Event Sources	Motion, Sensor Input, Client disconnection
Event Actions	Notification (E-mail), FTP, Alarm control, Recording
Housing	POM (Polyoxymetylen), RAL 5012 (ring)
Certification	Designed to meet IEC60945, IP66/IP67
Power Supply	PoE: 802.3af via RJ-45
Power Consumption	12W (max)
Operating Temperature	-40°C to +65°C

PHYSICAL SPECIFICATIONS:

Dimensions	W:153.00 [6.02"] x H:105.00 [4.13"] x D:201.00 [7.91"] mm [inch]
Weight	2.0kg / 4.41lbs
Pigtail Cable	2.5 [8.20] m [ft], Cat5e STP, RJ-45 terminated