

2810010115 - CAB42FWD-V2 - Image

2810010115

## CAB42FWD-V2

Floor cabinet 19" 42HU 800x800x2000mm fixed frame

- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Without rear door (available at request)
- ✓ Includes 2x side steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

---

## Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 42HU cabinet is DNV-GL type approved and it's perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 42 HU, 800 wide and 800 deep. Internal 19-inch fixed frame for up to 42 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.


By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.

This cabinet is suitable for:


- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT

- ✓ Paging
- ✓ Masterclock
- ✓ UPS (small)

# Technical Dimensions

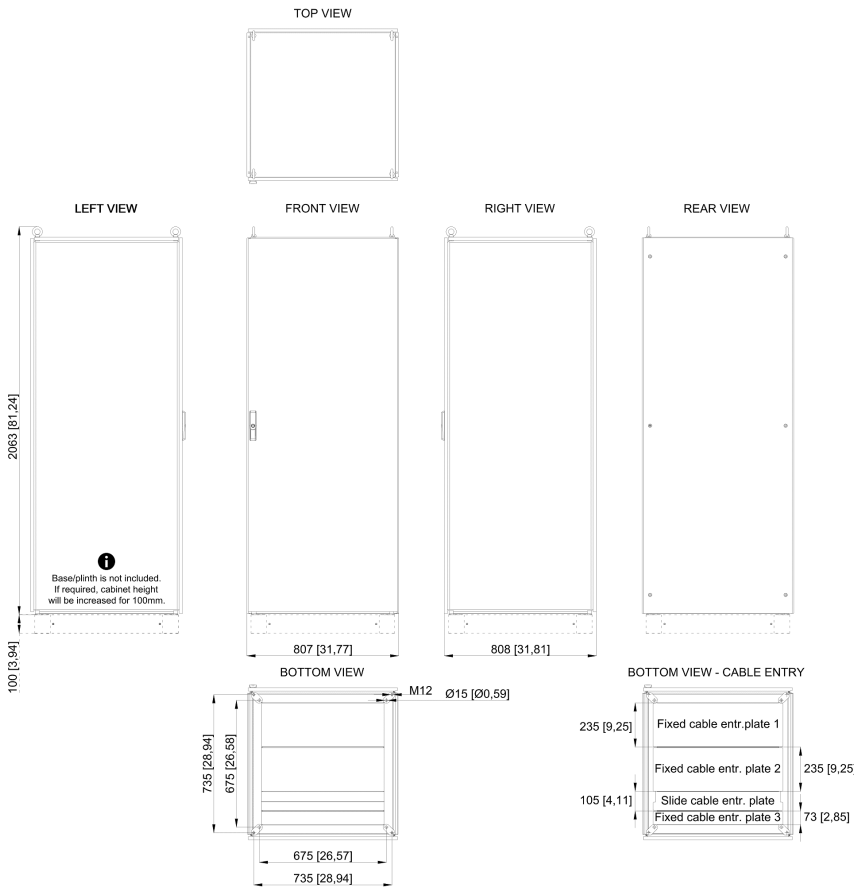

CABINET TECHNICAL DATA	
MODEL	RITTAL 8808.000
COLOR:	RAL 7035
BASE WEIGHT:	230kg (500lbs)
BASE/PLINTH:	NO
VENTILATION:	NONE (DEFAULT)
FRONT DOORS:	METAL
REAR DOORS:	NONE
DOOR HANDLE:	DOUBLE-BIT LOCK (DEFAULT)
DOOR STAY:	YES

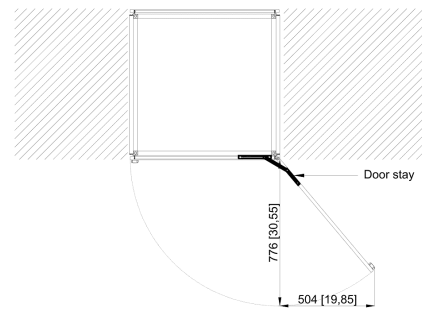

# Specifications

## GENERAL

Dimensions (WxDxH)	807x808x2163 mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

## Accessories



### CAB-DH-K

Door handle with key-lock for CABxx



### CAB-DH-P

Door handle with push-button for CABxx




### CAB-DH-PP

Door handle with push-button & pad-lock for CABxx




### CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable




### CAB-AVIP55-230

Active ventilation unit IP55 for CABxx, 133mm height, 230VAC




### CAB-AVIP55-115

Active IP55 ventilation for CABxx, 133mm height, 115VAC



### CAB-AVF-L-230

Active ventilation for CABxx with a steel door, 230VAC



### CAB-AVF-L-115

Active ventilation for CABxx with a steel door, 115VAC

CAB-AVT-115-230

Active ventilation for CABxx  
with glass door, 115-230VAC

CAB-1GD-42W

Cabinet glazed door  
800x2000mm

CAB-2SD-42W

Cabinet double steel door  
800x2000mm

CAB-1SD-42W

Cabinet steel door  
800x2000mm

CAB-CE-M

Cable entry gland 14xM25/32

CAB-CE-L

Cable entry gland  
2xM25/32/40, 1xM32/40/50,  
2xM40/50/160

CAB-CE-S

Cable entry gland w/sealing  
membranes Ø7 to 26mm

Rittal Base-Plinth

CAB-BASE-88

Base / plinth for 800x800mm  
cabinets