


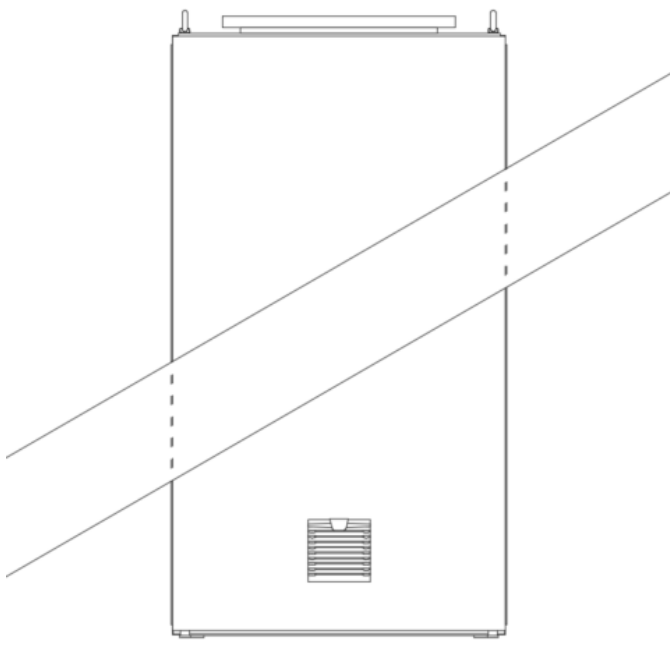

2810011077

CAB-AVF-S-115

Active ventilation for CABxx with a steel door, 115VAC

- ✓ A fan in the front door (Front fan unit 148,5x148,5mm 50m3/h 230Vac)
- ✓ Enclosure internal thermostat
- ✓ Thermostat Mounting plate
- ✓ Roof air outlet (no fan) (Vent attachment for VX top)
- ✓ IP22

Description



CAB-AVF-S-115 Active ventilation for CABxx with a steel door, 115VAC

*Include 115VAC front door fan unit (55-60m3/h), internal thermostat with mounting plate, and roof with air outlet

Note: For CAB24-FWD-V2, please add one additional fan:

- ✓ 2810011033 - Fan in front door (air in)(Front fan unit 148,5x148,5mm 55m3/h 115Vac)

Technical Dimensions

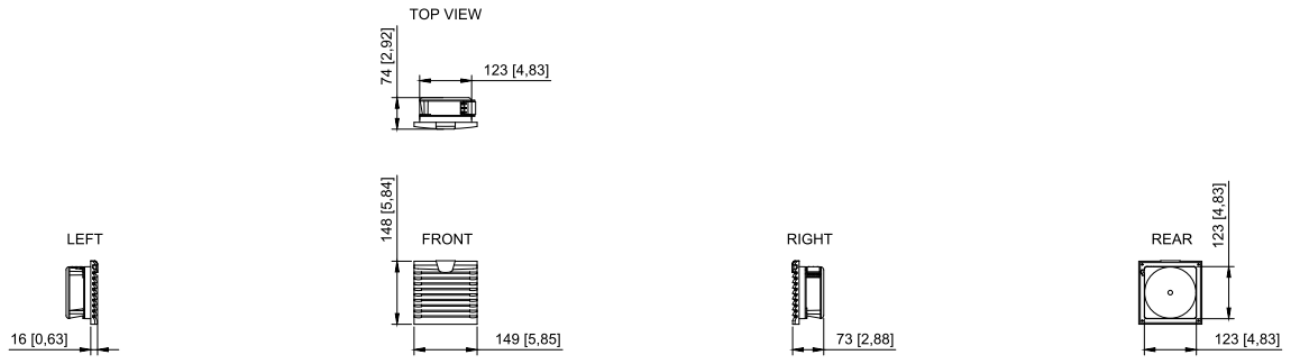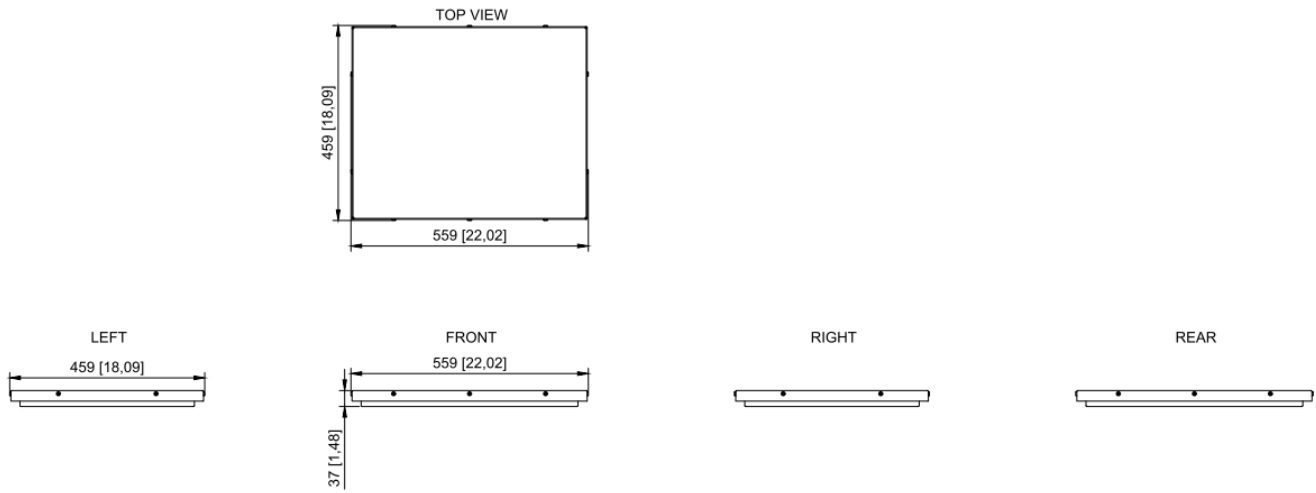

Specifications

ELECTRICAL DATA

Rated operating voltage	115 V, 1~, 50 Hz/60 Hz
Power consumption	At 50 Hz: 19 W
	At 60 Hz: 18 W
Air throughput, unimpeded air flow	Air power at 50 Hz: 55 m³ / h
	Air power at 60 Hz: 66 m³ / h

DIMENSIONS & WEIGHT

Roof air outlet dimensions (W x H x D)	559x459x37mm
Air inlet fan dimensions (W x H x D)	148,5x148,5x58,5mm

Used With



CAB15F-V2

Floor cabinet 19" 15HU
600x600x800mm fixed frame



CAB24FW-V2

Floor cabinet 19" 24HU
800x600x1200mm fixed frame



CAB24FWD-V2

Floor cabinet 19" 24HU
800x800x1200mm fixed frame



CAB24SW-V2

Floor-mounted 24HU cabinet -
800x1200x600mm (WxHxD)
swing frame



CAB24FWDD

Floor cabinet 19" 24HU
800x1000x1200mm fixed frame



CAB24F-V2

Floor cabinet 19" 24HU
600x600x1200mm fixed frame