

2810011079 - CAB-AVT-115-230 - Image

2810011079

CAB-AVT-115-230

Active ventilation for CABxx with glass door, 115-230VAC

- A fan in the cabinet top (Top fan unit 550x220mm 280m3/h)
- Enclosure internal thermostat
- Thermostat Mounting plate
- Air inlet
- ✓ IP20


Description


CAB-AVT-115-230 is active ventilation for CABxx with a glazed door. It operates on voltages between 100 V - 240 V, $1\sim$, 50 Hz/60 Hz.

The top ventilation unit is equipped with 2 fan units and ensures 280 m³/h of air throughput.

Technical Dimensions

certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.



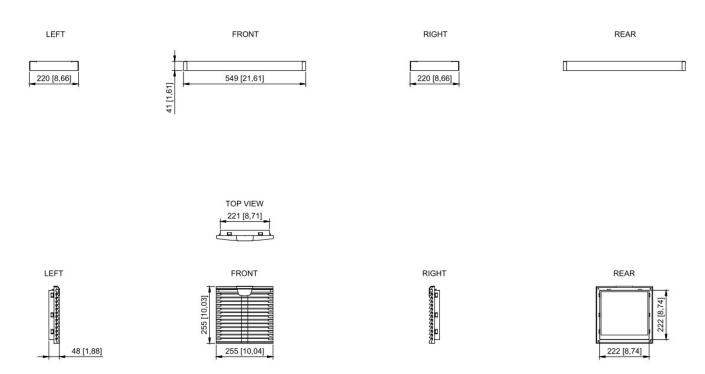

Specifications

ELECTRICAL DATA

Rated operating voltage	100 V - 240 V, 1~, 50 Hz/60 Hz
Rated current max.	At 50 Hz: 0.39 A
	At 60 Hz: 0.36 A
Air throughput, unimpeded air flow	280 m³/h

DIMENSIONS & WEIGHT

Roof air outlet dimensions (W x H x D)	550x42x220mm
Air inlet fan dimensions (W x H x D)	255x255x25mm

Used With

CA	D1	_	_	1/2
CΑ	DΙ	Э	Г-	٧Z

Floor cabinet 19" 15HU 600x600x800mm fixed frame

CAB24FW-V2

Floor cabinet 19" 24HU 800x600x1200mm fixed frame

CAB24FWD-V2

Floor cabinet 19" 24HU 800x800x1200mm fixed frame

CAB42F-V2

Floor cabinet 19" 42HU 600x600x2000mm fixed frame

CAB42FW-V2

Floor cabinet 19" 42HU 800x600x2000mm fixed frame

CAB42FWD-V2

Floor cabinet 19" 42HU 800x800x2000mm fixed frame

CAB24F-V2

Floor cabinet 19" 24HU 600x600x1200mm fixed frame

CAB24SW-V2

Floor-mounted 24HU cabinet -800x1200x600mm (WxHxD) swing frame

page 3/4

CAB42FD-V2

Floor cabinet 19" 42HU 600x800x2000mm fixed frame

CAB42FWDD

Floor cabinet 19" 42HU 800x1000x2000mm fixed frame

page 4/4