

2810010113-CA42F-V2-Image

2810010113

CAB42F-V2

Floor cabinet 19" 42HU 600x600x2000mm fixed frame

- ✓ Front metal door
- ✓ Front door handle: Double-bit lock
- ✓ Without rear door (available at request)
- ✓ Includes 2x side steel sheet panels
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. The floor-mounted 42HU cabinet is DNV-GL type approved and it's perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front metal door that is hinged on the right, and it can be swapped to the left if needed. The rear side of the cabinet is covered with a fixed metal plate and can be replaced with rear doors if needed. Cabinet variant 42 HU, 600 wide and 600 deep. Internal 19-inch fixed frame for up to 42 HU. Includes the choice of DIN rail mounting in the bottom, prepared for optional power switch-over modules and terminals. It comes with 3 fixed door plates, front doors, and chassis ground.


By default, the cabinet is IP55 but the final IP rating will depend on the chosen ventilation options.

This cabinet is suitable for:

- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT

- ✓ Paging
- ✓ Masterclock
- ✓ UPS (small)

Technical Dimensions

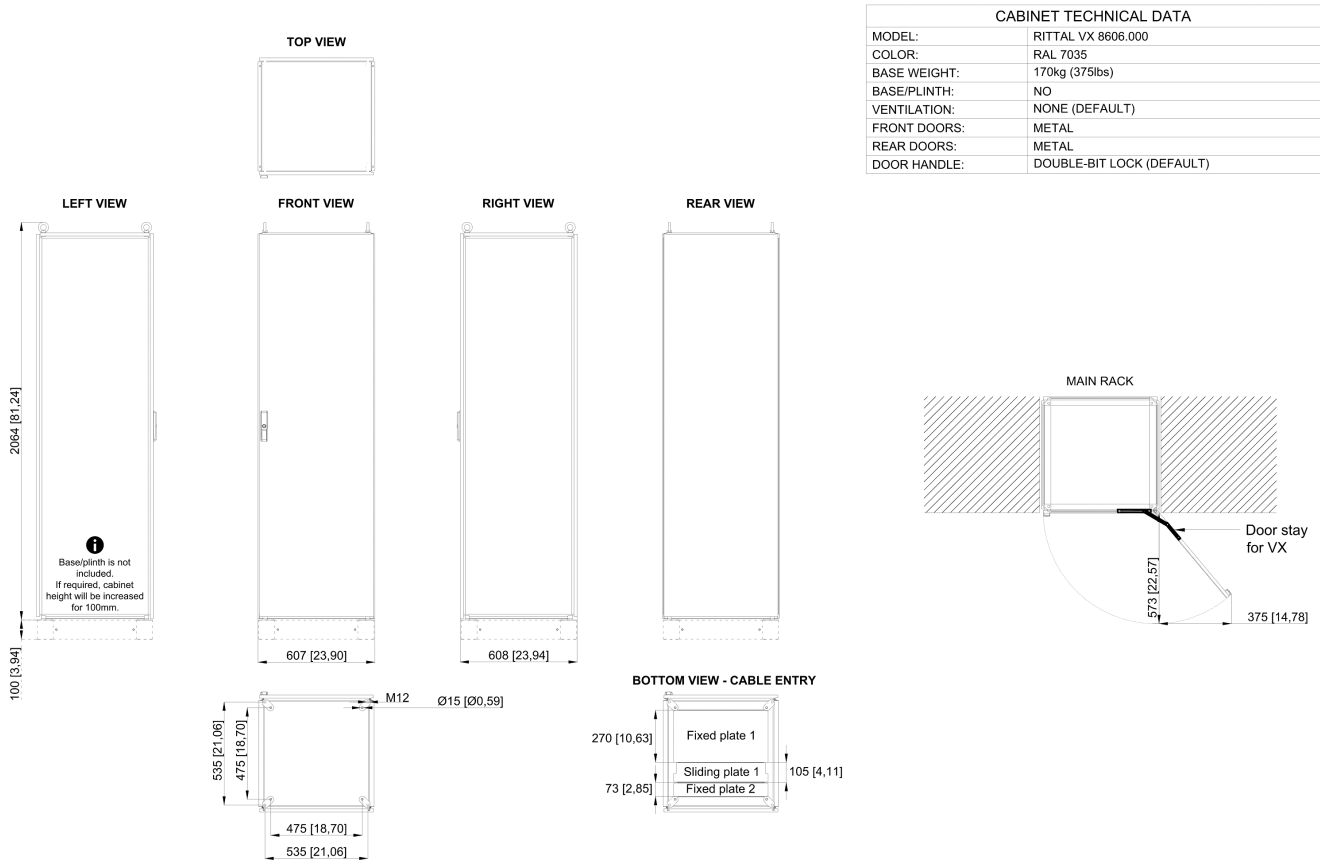

CABINET TECHNICAL DATA	
MODEL:	RITTAL VX 8606.000
COLOR:	RAL 7035
BASE WEIGHT:	170kg (375lbs)
BASE/PLINTH:	NO
VENTILATION:	NONE (DEFAULT)
FRONT DOORS:	METAL
REAR DOORS:	METAL
DOOR HANDLE:	DOUBLE-BIT LOCK (DEFAULT)

Specifications

GENERAL

Dimensions (WxDxH)	799x808x2163 mm
Color	RAL 7035
Material	Steel
Ingress grade	IP-55 (or less, based on selected ventilation)
Mounting	Floor mounted
Cable inlet	Bottom (top available on request)
Environmental Condition	Protected

Accessories



CAB-DH-K

Door handle with key-lock for CABxx



CAB-DH-P

Door handle with push-button for CABxx



CAB-DH-PP

Door handle with push-button & pad-lock for CABxx



CAB-CE-M

Cable entry gland 14xM25/32



CAB-CE-L

Cable entry gland
2xM25/32/40, 1xM32/40/50,
2xM40/50/160




CAB-CE-S

Cable entry gland w/sealing
membranes Ø7 to 26mm




CAB-LED

CABxx LED System light
w/sensor 100-240VAC,
w/connection cable



CAB-AVF-L-230

Active ventilation for CABxx
with a steel door, 230VAC



CAB-AVF-L-115

Active ventilation for CABxx
with a steel door, 115VAC

CAB-AVIP55-115/230

CAB-AVIP55-115

Active IP55 ventilation for
CABxx, 133mm heigh,
115VAC

CAB-AVIP55-115/230

CAB-AVIP55-230

Active ventilation unit IP55 for
CABxx, 133mm heigh,
230VAC

CAB-AVT-115-230

CAB-AVT-115-230

Active ventilation for CABxx
with glass door, 115-230VAC

Rittal Base-Plinth

CAB-BASE-66

Base / plinth for 600x600mm
cabinets