


Installing SIM Card on AMC-IP

| Item Number | Item Name | Description |
|--------------|-----------|--|
| 100 9202 100 | AMC-IP | Processor Board for AlphaCom XE and ESC1 |

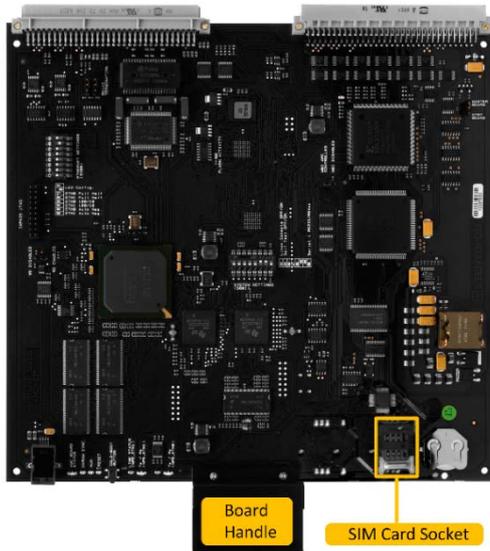

The AMC-IP processor board is used both in the AlphaCom XE audio server and the Exigo ESC1 system controller.

The SIM card on the AMC-IP processor board contains the MAC address of the device.

Install the SIM card by inserting it into the socket on the AMC-IP processor board.

To insert the SIM card into the socket:

1. Slide the metal retention clip in the direction shown to open the card socket (Figure 1 & Figure 2).

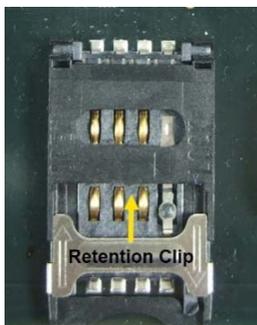


Figure 1: Retention Clip Closed



Figure 2: Retention Clip Open



Figure 3: Lid Open

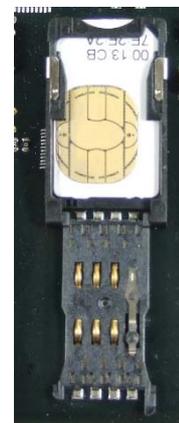


Figure 4: SIM Card in Socket

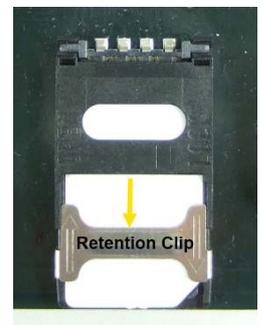


Figure 5: Socket Closed

2. Flip the socket lid open (Figure 3).
 - The lid itself comprises the socket
3. Insert the SIM card into the socket (Figure 4). Close the lid and slide the retention clip back to lock the socket (Figure 5).