1008140225

TA-22B

Industrial Plugbox & Cable for Headset with PTT

- ✓ 10m cable
- ✓ Compact, rugged plugbox with PTT for Industrial application
- ✓ IP Rating: IP67
- ✓ For use with AK5850HS Headset
- ✓ Low smoke and halogen free cable
- ✓ Designed for Turbine Industrial intercoms
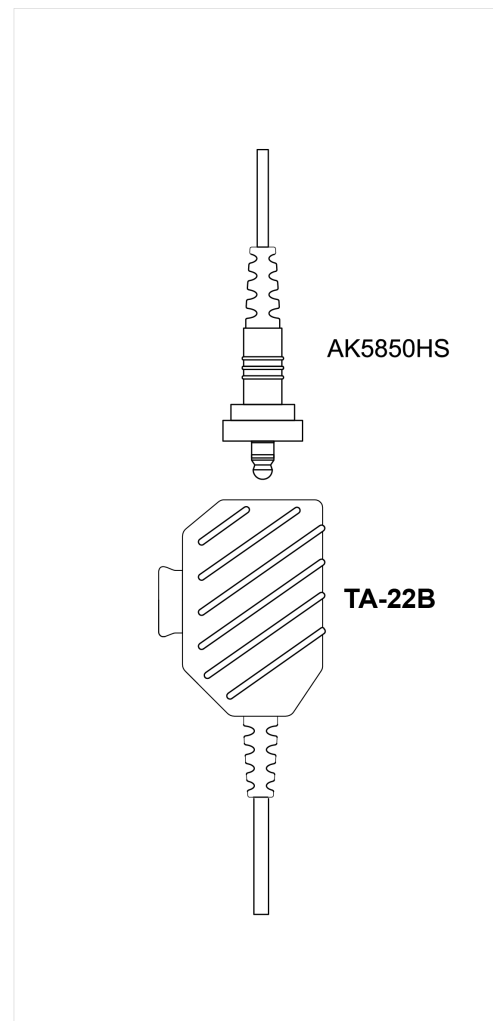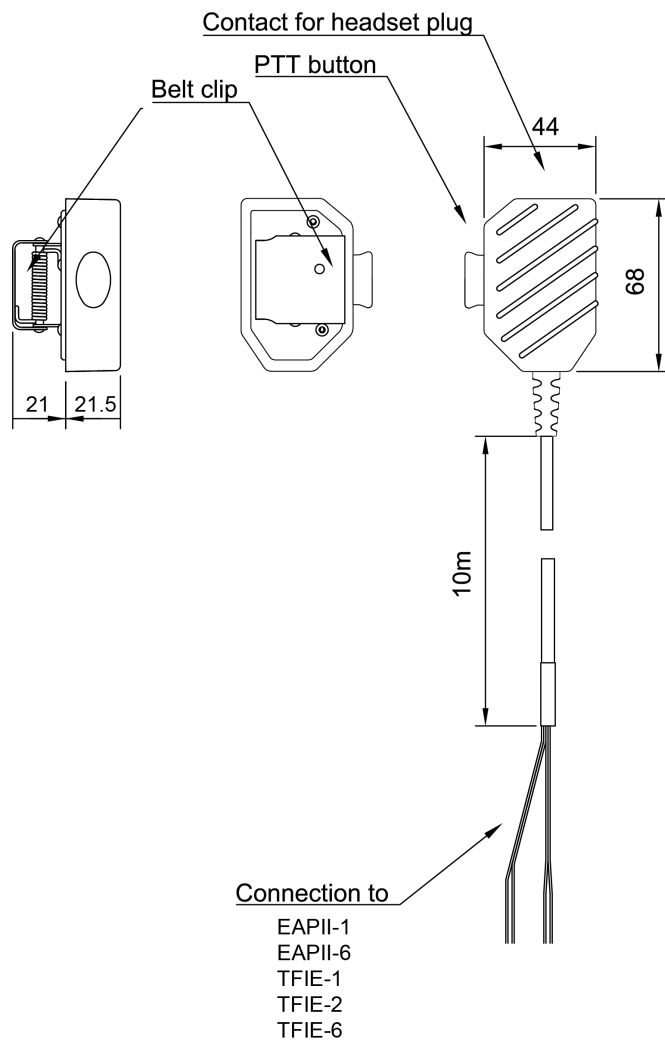
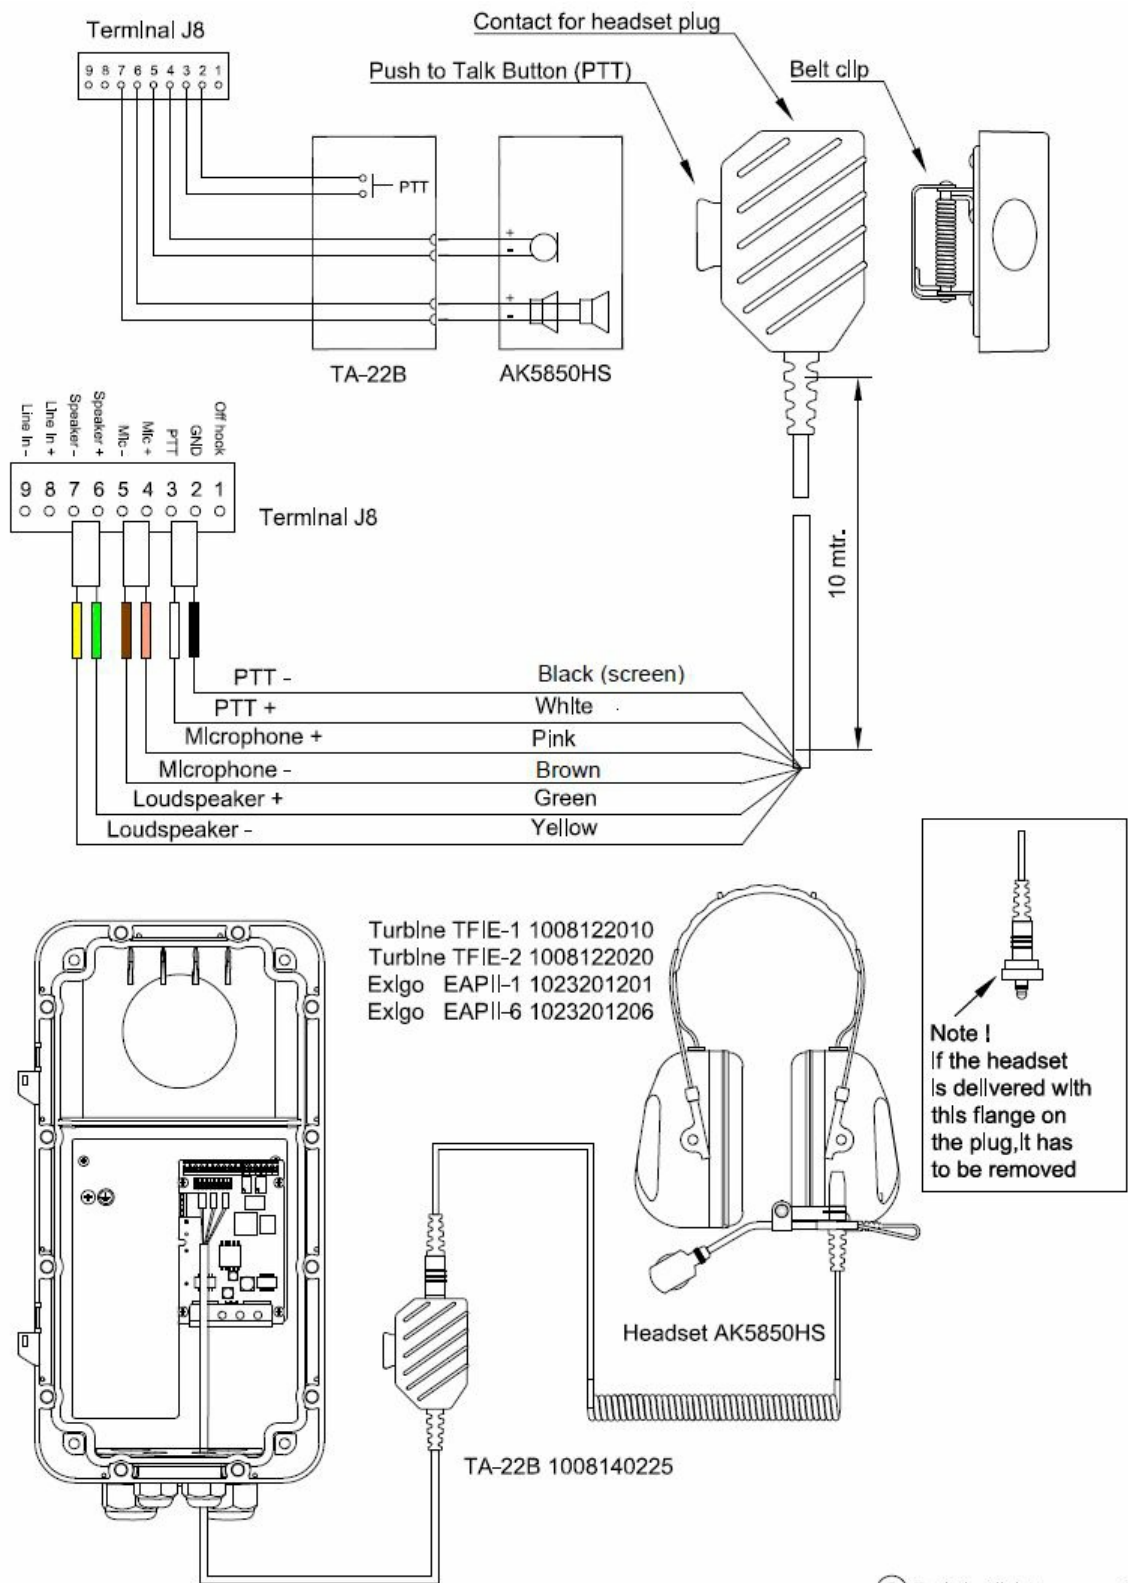ICX-AlphaCom   Exigo   IP67

Description

The TA-22B Cable and Plugbox complements the AK5850HS Headset in offering a long-range (10 meters), robust, pluggable solution meeting industrial headset requirements. Once connected with the AK5850HS, the plugbox offers a water- and dust-tight connection (IP67) as well as an easy-to-reach PTT button.

Any headset using a standard Nexus 4-pole connection is compatible with the TA-22B (applies to dynamic microphone only - please observe impedances and microphone sensitivities).

Technical Dimensions

Contact for headset plug

PTT button

Belt clip

44

68

21 21.5

10m

Connection to
EAPII-1
EAPII-6
TFIE-1
TFIE-2
TFIE-6

AK5850HS

TA-22B

Specifications

Terminal J8

9 8 7 6 5 4 3 2 1

PTT

TA-22B   AK5850HS

Contact for headset plug
Push to Talk Button (PTT)
Belt clip

Terminal J8

9	8	7	6	5	4	3	2	1
Line In -	Line In +	Speaker +	Speaker -	Mic -	Mic +	PTT	GND	Off hook

10 mtr.

PTT -   Black (screen)
PTT +   White
Microphone +   Pink
Microphone -   Brown
Loudspeaker + Green
Loudspeaker - Yellow

Turbine TFIE-1 1008122010
Turbine TFIE-2 1008122020
Exigo   EAPII-1 1023201201
Exigo   EAPII-6 1023201206

Note !
If the headset
is delivered with
this flange on
the plug, it has
to be removed

Headset AK5850HS

TA-22B 1008140225

GENERAL

Cable Length	10 meters
Operational Temperature	-40°C to +60°C
Ingress Protection (IP)	IP67 (once connected)

Used With

IP and SIP Intercom

TFIE-1

IP and SIP Intercom

IP and SIP Intercom

TFIE-2

IP and SIP Intercom

AK5850HS

Ex-approved Headset

EAPII-1

Exigo Industrial Access
Panel, 1 Button

IP and SIP Intercom

TFIE-6

IP and SIP Intercom

EAPII-6

Exigo Industrial Access
Panel, 6 Buttons