

SPA-W1-D Front

3005010197

SPA-W1-D

Dual Weatherproof PA Panel



IP66

Description


- Weatherproof PA panel for dual system
- Built-in pre-amplifier with preset signal level and tone controls
- Requires microphone with PTT
- ✓ Plug for WP handheld microphone P-66 or P-66/10
- Wall mounting outdoor / Indoor
- Local mute contact for external loudspeaker (from hardware version 4.0)

This waterproof panel gives All Call Message in a SPA-V2 public address and general alarm dual system.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0 This function must be in combination with relay box

Technical Dimensions

page 1/3

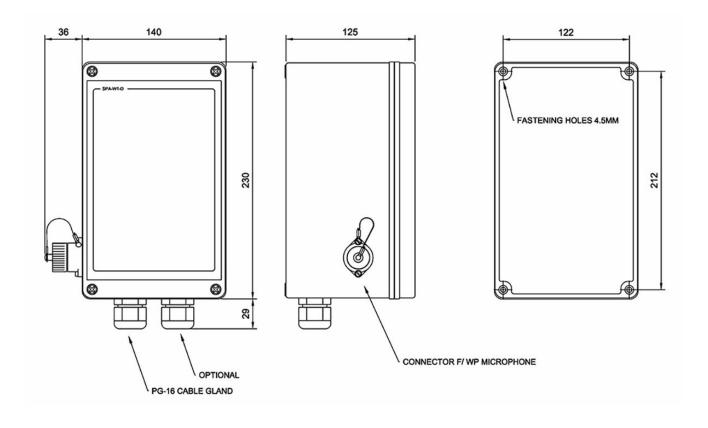

page 2/3

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0. 5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensivity microphone	200 ohm / 0,5mV
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm2
Protection	IP-66
Operating temperature	-25°C TO +55°C
Environmental Condition	Exposed

Accessories





P-66

Handheld Microphone Waterproof

P-66/10

Handheld Microphone with 10-Meter Cable Waterproof