2810010124

# CAB24FWDD

Floor cabinet 19" 24HU 800x1000x1200mm fixed frame

- ✓ Front door: Glazed door
- ✓ Front door handle: CAB-DH-K
- ✓ Rear door: Steel doors
- ✓ Rear door handle: CAB-DH-K
- ✓ Including 4x eyebolts for crane transportation
- ✓ The door hinged on the right, may be swapped to the left
- ✓ Base/plinth not included, can be ordered separately

## Description

Our all-new series of multi-use cabinets are designed to be used in a marine environment. This floor-mounted 24HU cabinet is perfect for installing our 19" system components to create a complete system for your installation.

The cabinet comes with a front glazed door that is hinged on the right, and it can be swapped to the left if needed. The rear side features a single metal door. Cabinet variant 24HU, 800mm wide and 1000mm deep. Internal 19-inch fixed frame for up to 24 HU.
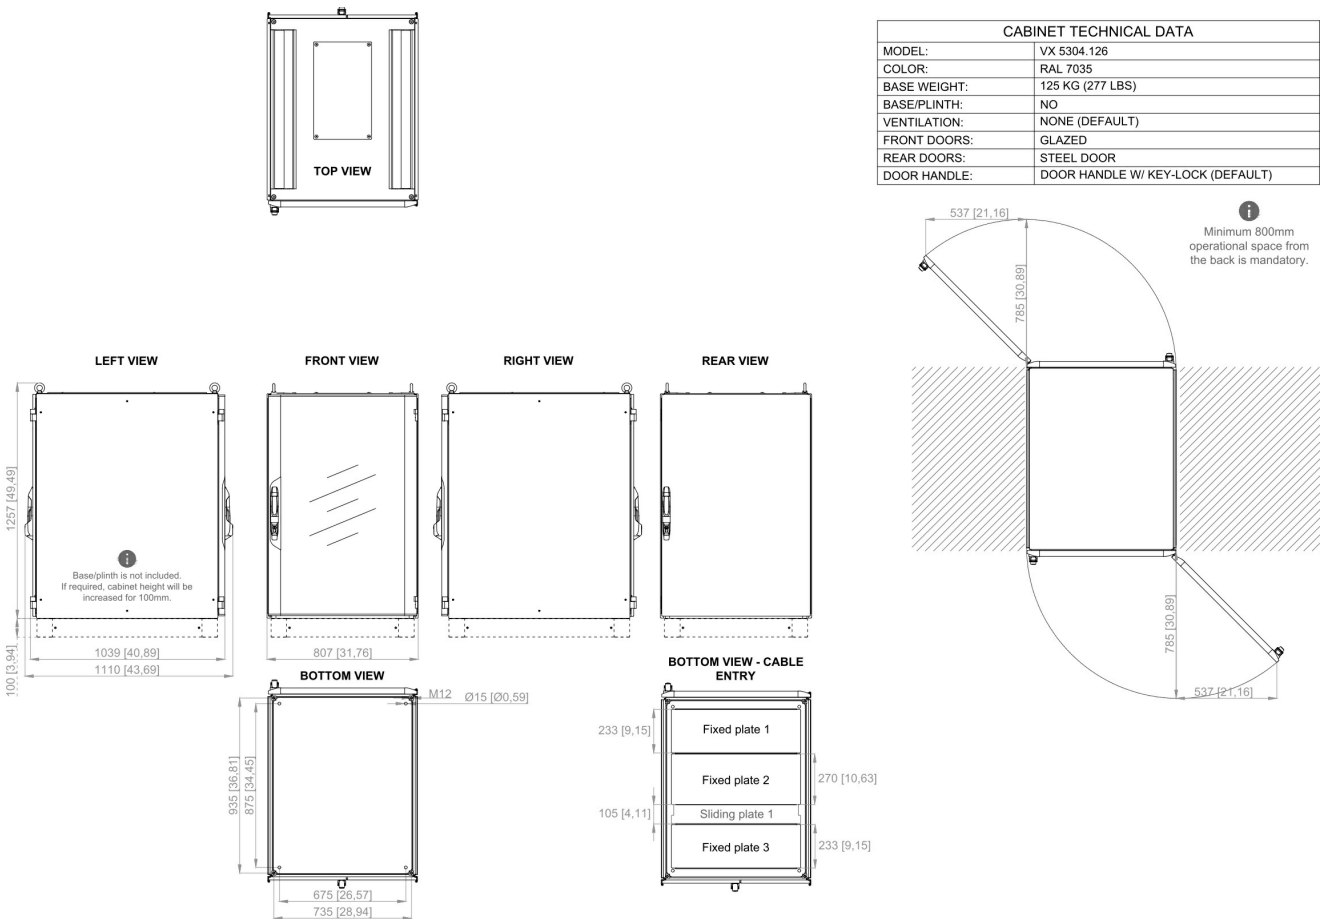
Multi-part roof plate with cable entry on both sides via brush strips over the whole enclosure depth. The roof incorporates a concealed cut-out to accommodate a CAB-AVT-W-115-230 fan unit for active ventilation. The cover plate can be raised on spacer pillars to support passive ventilation if required.

This floor-mounted 24HU cabinet is suitable for:
- ✓ ACM Advanced modules
- ✓ SPA-V2 Public Address
- ✓ EXIGO Public Address
- ✓ Radio
- ✓ LAN
- ✓ CCTV
- ✓ IPTV
- ✓ DECT
- ✓ Paging

www.zenitel.com          info@zenitel.com                                    Last revision date: 2025-02-06 13:42

- ✓ Masterclock
- ✓ UPS

# Technical Dimensions

**TOP VIEW**

| CABINET TECHNICAL DATA | |
|---|---|
| MODEL: | VX 5304.126 |
| COLOR: | RAL 7035 |
| BASE WEIGHT: | 125 KG (277 LBS) |
| BASE/PLINTH: | NO |
| VENTILATION: | NONE (DEFAULT) |
| FRONT DOORS: | GLAZED |
| REAR DOORS: | STEEL DOOR |
| DOOR HANDLE: | DOOR HANDLE W/ KEY-LOCK (DEFAULT) |

537 [21,16]

785 [30,89]

ℹ Minimum 800mm operational space from the back is mandatory.

785 [30,89]

537 [21,16]

**LEFT VIEW**  **FRONT VIEW**  **RIGHT VIEW**  **REAR VIEW**

1257 [49,49]

ℹ Base/plinth is not included. If required, cabinet height will be increased for 100mm.

100 [3,94]

1039 [40,89]

1110 [43,69]

807 [31,76]

**BOTTOM VIEW**

M12  Ø15 [Ø0,59]

935 [36,81]

875 [34,45]

675 [26,57]

735 [28,94]

**BOTTOM VIEW - CABLE ENTRY**

233 [9,15]

| Fixed plate 1 |
| Fixed plate 2 |
| Sliding plate 1 |
| Fixed plate 3 |

270 [10,63]

105 [4,11]

233 [9,15]

# Specifications

**GENERAL**

| | |
|---|---|
| Dimensions (WxDxH) | 799x1110x1356 mm |
| Color | RAL 7035 |
| Material | Steel / Glazed front door |
| Cable inlet | Bottom & top |
| Ingress grade | n/a (does not apply to brush cable entries) |
| Mounting | Floor mounted |
| Environmental Condition | Protected |

# Accessories

### CAB-DH-K

Door handle with key-lock for CABxx

### CAB-DH-P

Door handle with push-button for CABxx

### CAB-DH-PP

Door handle with push-button &amp; pad-lock for CABxx

### CAB-LED

CABxx LED System light w/sensor 100-240VAC, w/connection cable



### CAB-BASE-810

Base / plinth for 800x1000mm cabinets

www.zenitel.com info@zenitel.com